LOC I-IWA	APP CRS	Rwy Idg	10201
110.15	303°	TDZE	1380
		Apt Elev	1382

ILS or LOC RWY 30C

PHOENIX-MESA GATEWAY (IWA)

When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase all DA/MDA 80 feet, increase S-ILS 30C, S-LOC 30C all Cats visibility ¼ mile, circling Cats A/B/C visibility ¼ mile, Cat E ½ mile.

MISSED APPROACH: Climb to 2800 then climbing right turn to 5000 via heading 145° and IWA VORTAC R-015 to IWA VORTAC and hold, continue climb-in-hold to 5000 (TACAN aircraft continue via IWA VORTAC R-122 to HALLB/9.9 DME and hold, continue climb-in-hold to 5000, hold SE, LT, 302° inbound).

ATIS	PHOENIX APP CON	GATEWAY TOWER ★	GND CON	CLNC DEL
133.5 270.275	124.9 353.8	120.6 (CTAF) 289.4 (WEST) 124.75 379.225 (EAST)	128.25 275.8	135.05

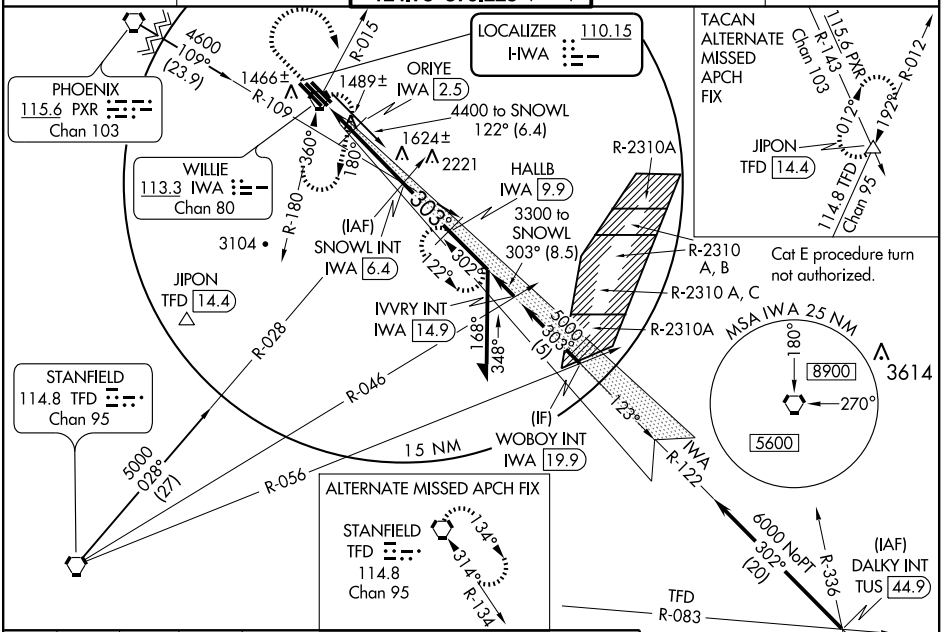

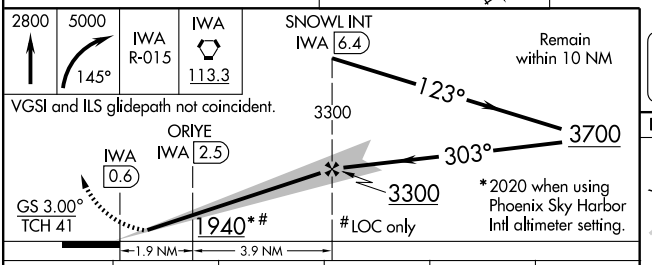



CATEGORY	A	B	C	D	E
S-ILS 30C	1580-¾ 200 (200-¾)				
S-LOC 30C	1940-1 560 (600-1)		1940-1½ 560 (600-1½)	1940-1¾ 560 (600-1¾)	1940-2 560 (600-2)
CIRCLING	1940-1 558 (600-1)		1940-1½ 558 (600-1½)	1940-2 558 (600-2)	1980-2 598 (600-2)
ORIYE FIX MINIMUMS					
S-LOC 30C	1800-1 420 (500-1)		1800-1¼ 420 (500-1¼)		1800-1½ 420 (500-1½)
CIRCLING	1800-1 418 (500-1)	1840-1 458 (500-1)	1840-1½ 458 (500-1½)	1940-2 558 (600-2)	1980-2 598 (600-2)

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

SW-4, 19 NOV 2009 to 17 DEC 2009