WAAS CH 93811 W22B	APP CRS 225°	Rwy Idg 8273 TDZE 262 Apt Elev 262

RNAV (GPS) RWY 22R

LITTLE ROCK/ADAMS FIELD (LIT)

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Stuttgart altimeter setting and increase all DA 82 feet and all MDA 100 feet; increase LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C and D and circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Stuttgart altimeter setting. For inoperative ALSF-2, when using Stuttgart altimeter setting, increase LPV all Cats visibility to RVR 5000.

ALSF

MISSED APPROACH: Climb to 2900 direct RIWLO and via 219° track to BAUDE and hold.

ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 291.775 353.6	118.7 257.8	121.9 339.8	118.95

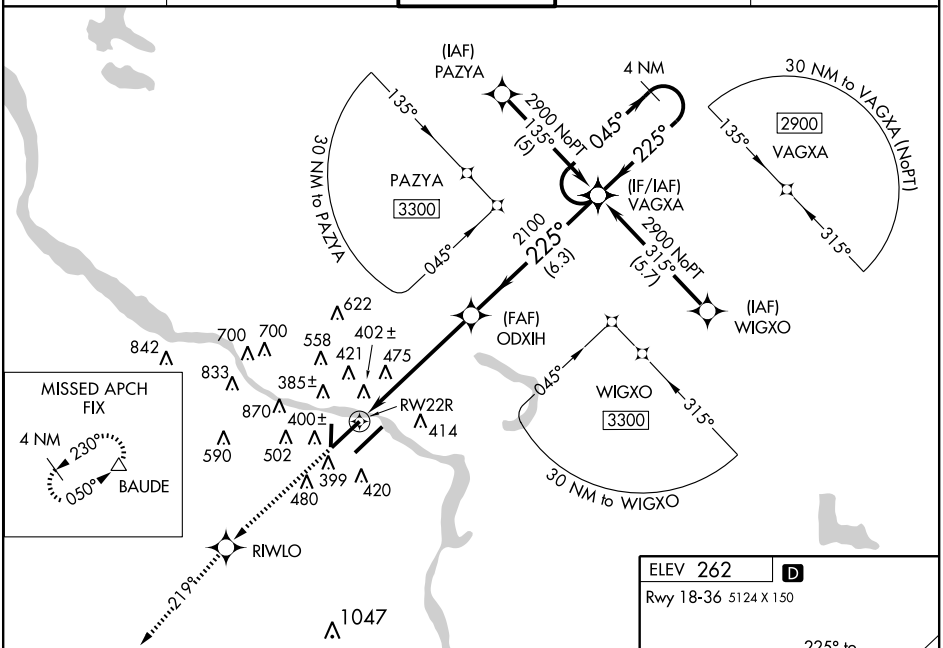

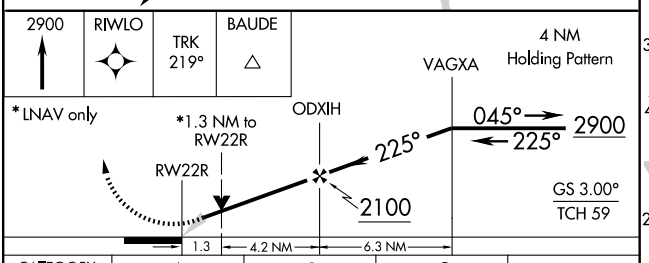

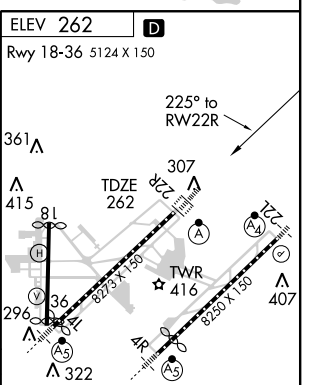

CATEGORY	A	B	C	D
LPV DA	462/24 200 (200-½)			
LNAV/VNAV DA	727/50 465 (500-1)			
LNAV MDA	740/24 478 (500-½)		740/40 478 (500-¾)	740/50 478 (500-1)
CIRCLING	760-1 498 (500-1)		880-1¾ 618 (700-1¾)	1180-3 918 (1000-3)

TDZ/CL Rwy 22R
HIRL Rwys 4R-22L, 4L-22R and 18-36

SC-1, 11 MAR 2010 to 08 APR 2010

SC-1, 11 MAR 2010 to 08 APR 2010