LOC/DME I-PKI	APP CRS	Rwy ldg	7800
111.95	168°	TDZE	499
Chan 56 (Y)		Apt Elev	501

ILS or LOC RWY 17L
LOUISVILLE INTL-STANDIFORD FIELD (SDF)

DME or RADAR Required.

MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 3000 via heading 100° and IIU R-279 to IIU VORTAC and hold, continue climb-in-hold to 3000.

ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL
118.725	132.075 327.0 (EAST) 123.675 327.0 (WEST)	124.2 257.8	121.7 348.6	126.1 275.8

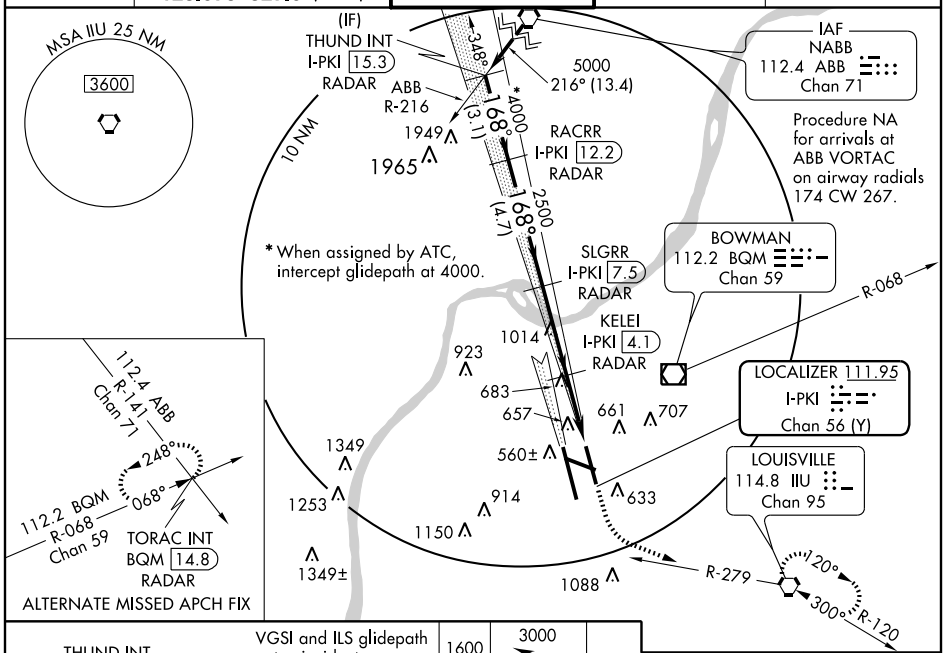

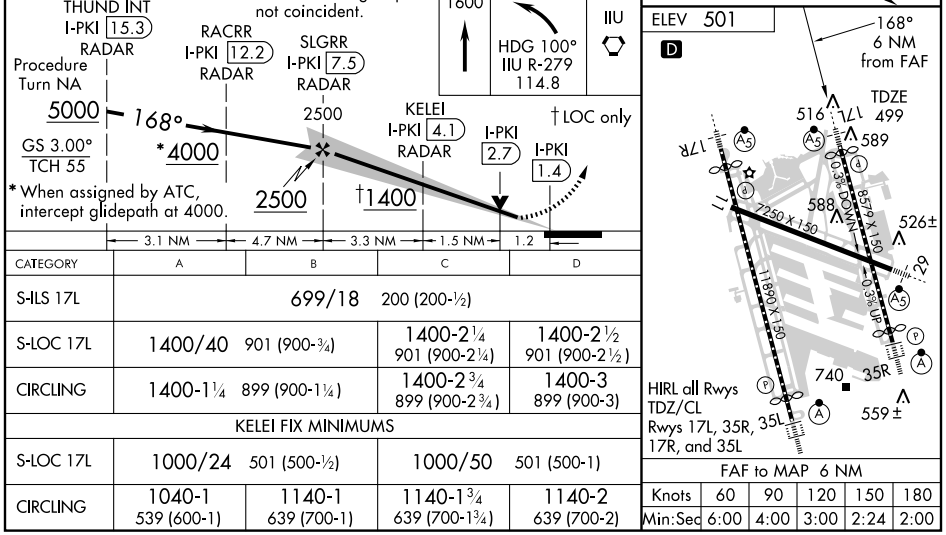

CATEGORY	A	B	C	D
S-ILS 17L	699/18 200 (200-½)			
S-LOC 17L	1400/40 901 (900-¾)		1400-2¼ 901 (900-2¼)	1400-2½ 901 (900-2½)
CIRCLING	1400-1¼ 899 (900-1¼)		1400-2¾ 899 (900-2¾)	1400-3 899 (900-3)
KELEI FIX MINIMUMS				
S-LOC 17L	1000/24 501 (500-½)		1000/50 501 (500-1)	
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1140-1¾ 639 (700-1¾)	1140-2 639 (700-2)

FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

SE-1, 19 NOV 2009 to 17 DEC 2009

SE-1, 19 NOV 2009 to 17 DEC 2009