WAAS CH 70709 W35D	APP CRS 348°	Rwy Idg 7800 TDZE 480 Apt Elev 501

RNAV (GPS) RWY 35R

LOUISVILLE INTL-STANDIFORD FIELD (SDF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 3000 direct WOGON and via 015° track to ABB VORTAC and hold.

ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL
118.725	132.075 327.0 (EAST) 123.675 327.0 (WEST)	124.2 257.8	121.7 348.6	126.1 275.8

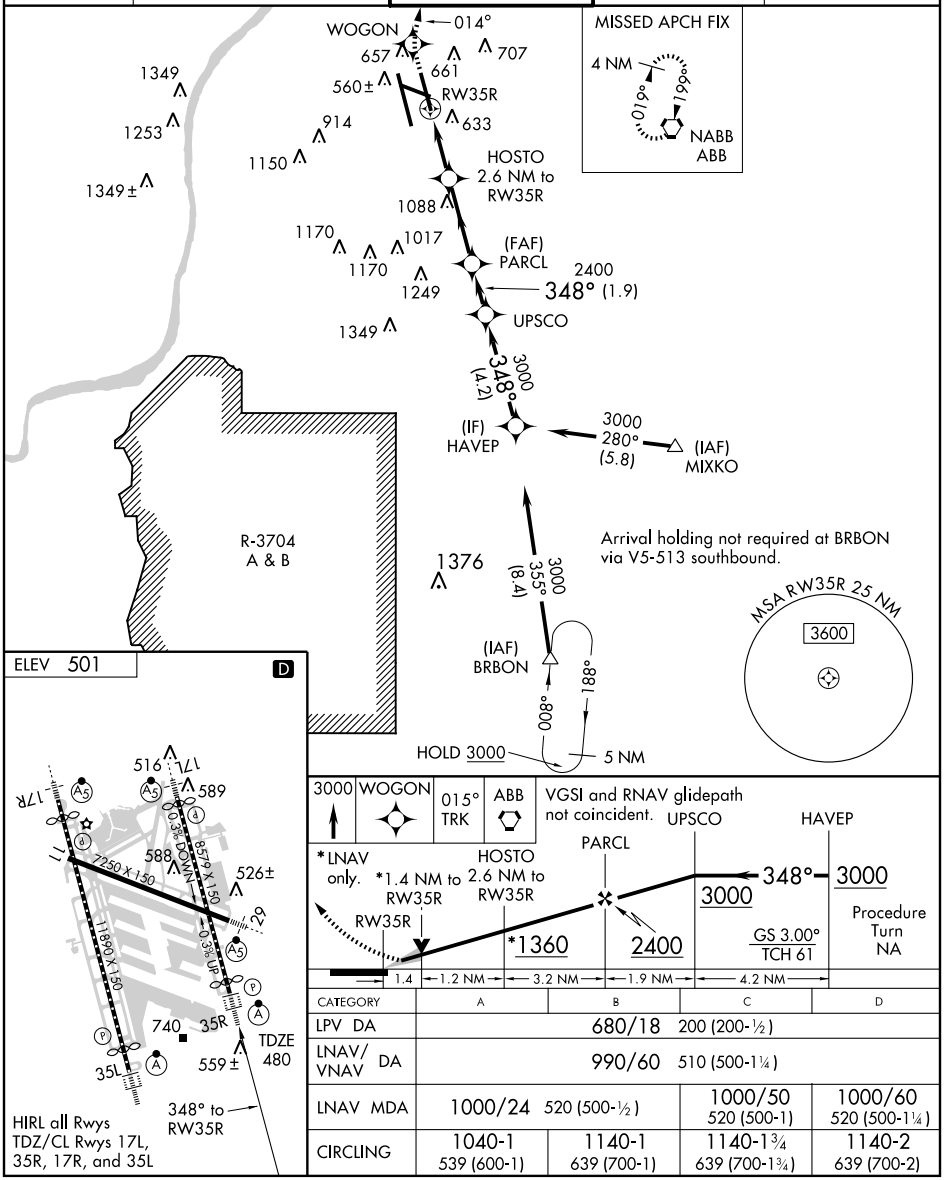

CATEGORY	A	B	C	D
LPV DA	680/18 200 (200-½)			
LNAV/VNAV DA	990/60 510 (500-1¼)			
LNAV MDA	1000/24 520 (500-½)		1000/50 520 (500-1)	1000/60 520 (500-1¼)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1140-1¾ 639 (700-1¾)	1140-2 639 (700-2)

SE-1, 19 NOV 2009 to 17 DEC 2009
SE-1, 19 NOV 2009 to 17 DEC 2009