ILS or LOC RWY 17R

LOUISVILLE INTL-STANDIFORD FIELD (SDF)

LOC/DME I-SNU	APP CRS	Rwy Idg 10000
110.3	168°	TDZE 490
Chan 40		Apt Elev 501

For inoperative MALSR, increase VOYUK FIX minimums S-LOC 17R Cat. D visibility to RVR 5000. DME or RADAR Required.
**RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 3000 via IIU R-264 to NADDI Int/IIU 24.7 DME and hold.

ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL
118.725	132.075 327.0 (EAST) 123.675 327.0 (WEST)	124.2 257.8	121.7 348.6	126.1 275.8

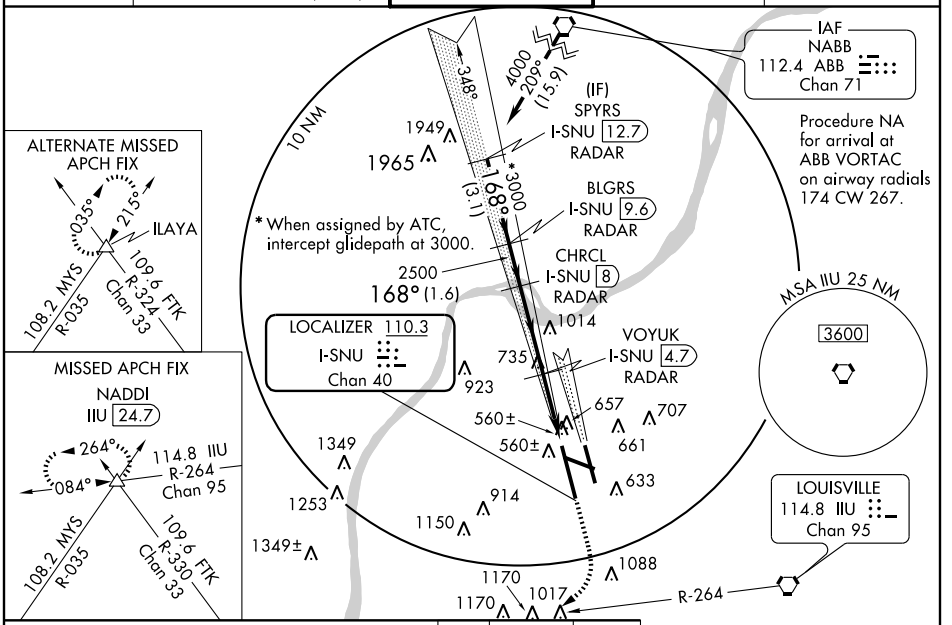

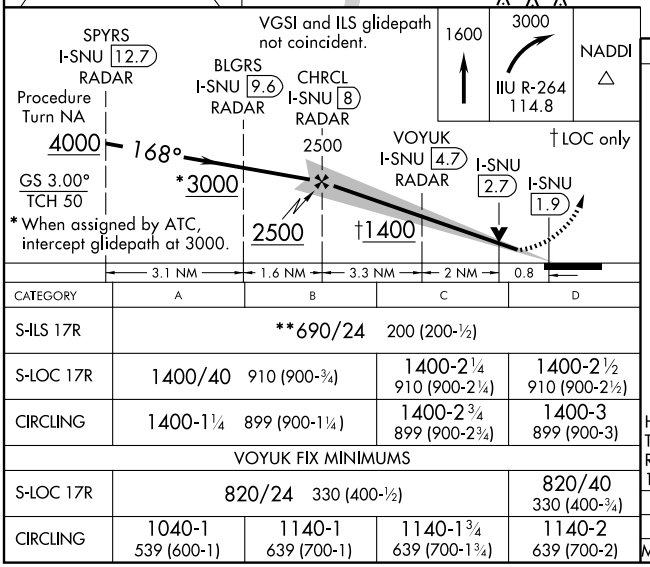

CATEGORY	A	B	C	D
S-ILS 17R	**690/24 200 (200-½)			
S-LOC 17R	1400/40 910 (900-¾)		1400-2¼ 910 (900-2¼)	1400-2½ 910 (900-2½)
CIRCLING	1400-1¼ 899 (900-1¼)		1400-2¾ 899 (900-2¾)	1400-3 899 (900-3)
VOYUK FIX MINIMUMS				
S-LOC 17R	820/24 330 (400-½)			820/40 330 (400-¾)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1140-1¾ 639 (700-1¾)	1140-2 639 (700-2)

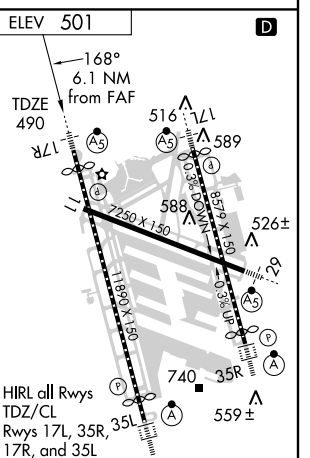

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

SE-1, 11 MAR 2010 to 08 APR 2010
SE-1, 11 MAR 2010 to 08 APR 2010