LOC I-PDT	APP CRS	Rwy Idg	6301
110.3	254°	TDZE	1487
		Apt Elev	1497

ILS or LOC/DME RWY 25

PENDLETON/ EASTERN OREGON RGNL AT PENDLETON (PDT)

T DME from PDT VORTAC. Simultaneous reception of I-PDT and PDT VORTAC DME required.
A When local altimeter setting not received, use Walla Walla altimeter setting and increase all DA/MDA 120 feet, and S-LOC 25 Cat C/D visibility ¼ mile. For inoperative MALSR when using Walla Walla altimeter setting increase S-ILS 25 visibility all Cats to 1 mile.
** RVR 1800 authorized with the use of FD or AP or HUD to DA, NA when using Walla Walla altimeter seting.

MALSR (A5)

MISSED APPROACH: Climb to 4000 direct PDT VORTAC and hold, continue climb-in-hold to 4000.

ASOS	CHINOOK APP CON ★	PENDLETON TOWER ★	GND CON	UNICOM
118.325	133.15 379.15	119.7 (CTAF) (L) 257.8	121.9 257.8	122.95

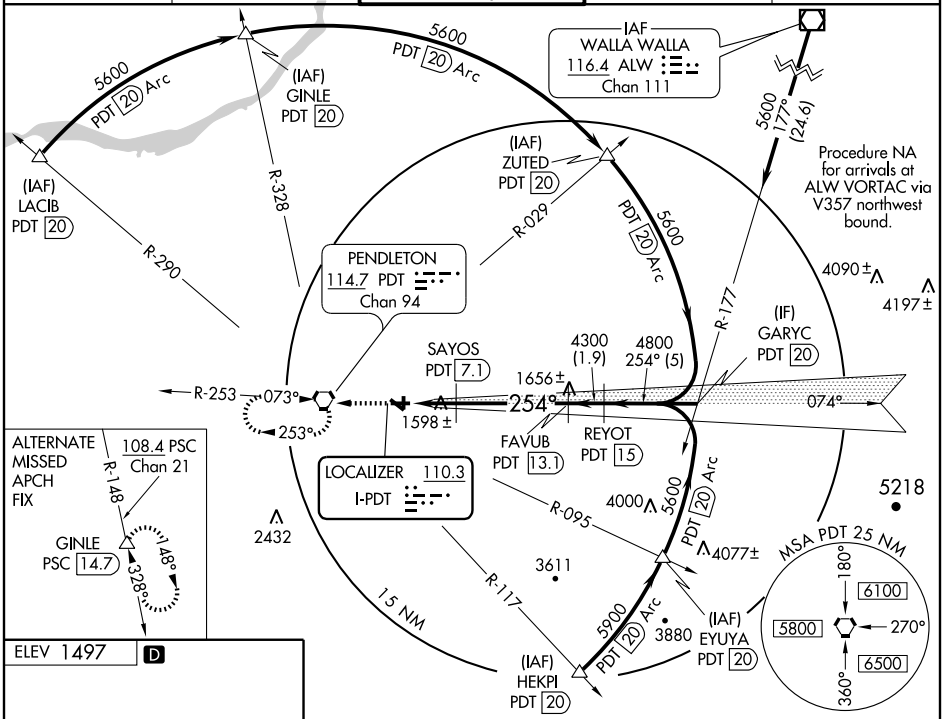



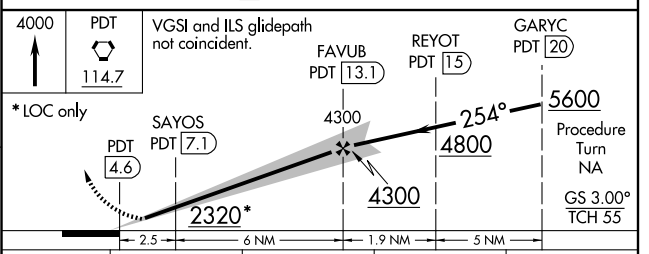

CATEGORY	A	B	C	D
S-ILS 25		**1687/24 200 (200-½)		
S-LOC 25		1860/24 373 (400-½)		1860/40 373 (400-¾)
CIRCLING	1920-1 423 (500-1)	1960-1 463 (500-1)	1960-1½ 463 (500-1½)	2060-2 563 (600-2)

REIL Rwys 11 and 29 (L)
MIRL Rwy 11-29 (L)
HIRL Rwy 7-25 (L)

NW-1, 19 NOV 2009 to 17 DEC 2009
NW-1, 19 NOV 2009 to 17 DEC 2009