WAAS	APP CRS	Rwy Idg	5700
CH 73008	151°	TDZE	352
W15A		Apt Elev	352

RNAV (GPS) RWY 15
RED BLUFF MUNI (RBL)

Baro-VNAV NA when using Redding altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
DME/DME RNP- 0.3 NA. Visibility reduction by helicopters NA.
When local altimeter setting not received; use Redding altimeter setting and increase all DA/MDA 80 feet and increase LPV visibility ¼ mile all Cats, LNAV/ VNAV visibility ¼ mile all Cats, LNAV visibility ¼ mile Cat C and D.

MISSED APPROACH: Climb to 3500 direct TOWAN and hold.

ASOS	OAKLAND CENTER	UNICOM
120.775	132.2 350.3	123.0 (CTAF) L

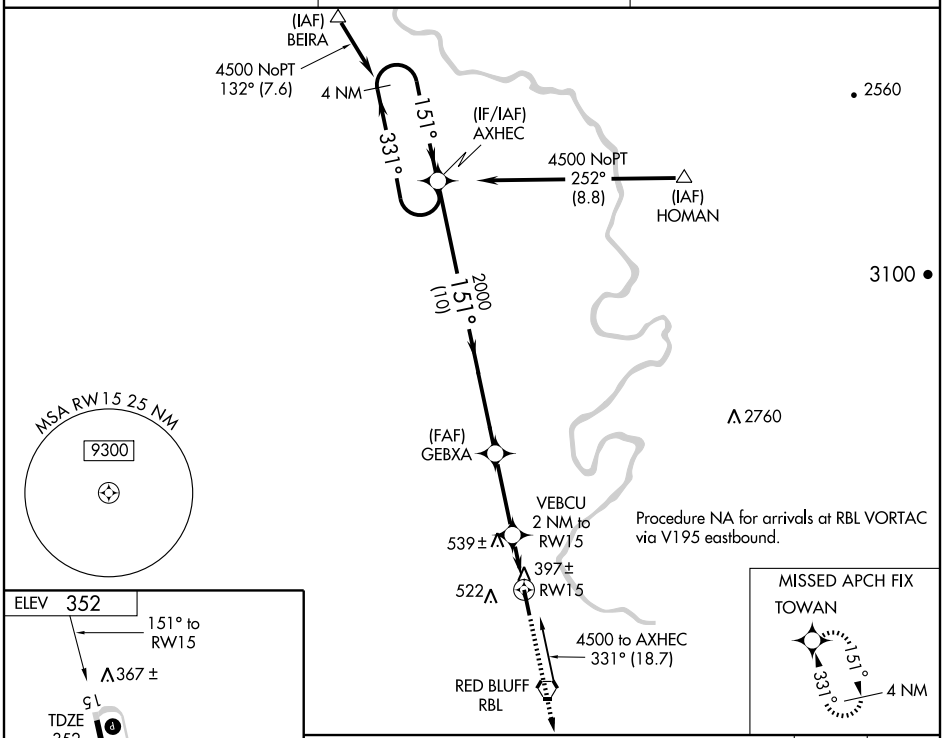

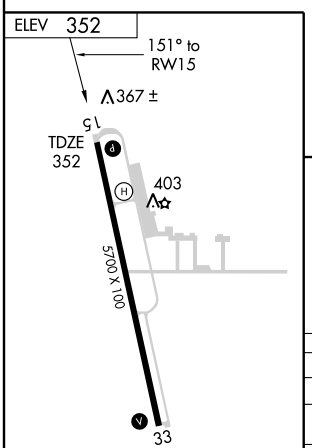

MIRL Rwy 15-33 L
REIL Rwys 15 and 33

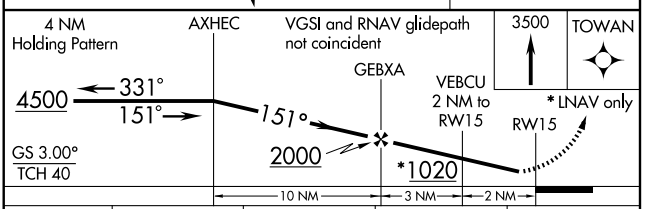

CATEGORY	A	B	C	D
LPV DA	602-1 250 (300-1)			
LNAV/VNAV DA	789-1½ 437 (500-1½)			
LNAV MDA	820-1 468 (500-1)		820-1¼ 468 (500-1¼)	820-1½ 468 (500-1½)
CIRCLING	840-1 488 (500-1)		840-1½ 488 (500-1½)	920-2 568 (600-2)

SW-2, 11 MAR 2010 to 08 APR 2010
SW-2, 11 MAR 2010 to 08 APR 2010