

RNAV (GPS) RWY 3





ROSWELL INTL AIR CENTER (ROW)

WAAS CH 50202 W03A	APP CRS 035°	Rwy Idg 13001 TDZE 3667 Apt Elev 3671
--	------------------------	--

ASR DME/DME RNP-0.3 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 41°C (106°F).
If local altimeter setting not received, use Artesia altimeter setting and increase all DAs/MDAs 100 feet.
VDP and Baro-VNAV NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON * 119.6 239.0	ROSWELL TOWER * 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

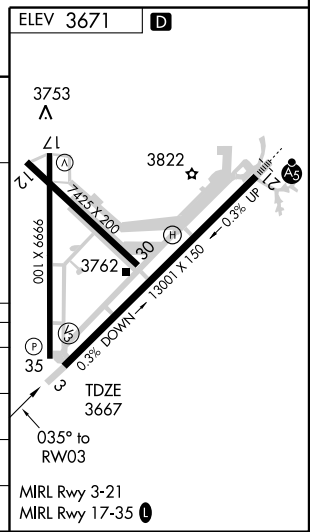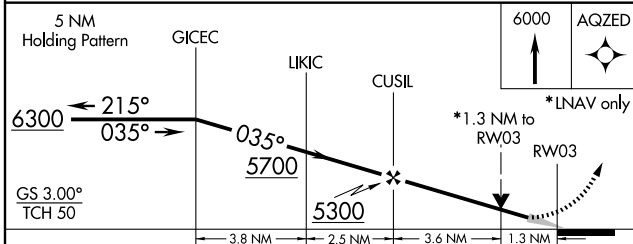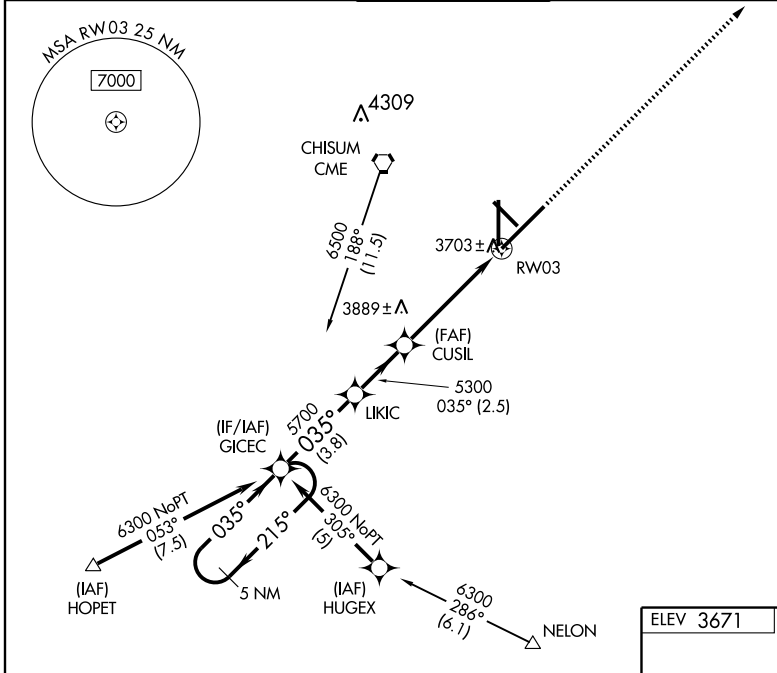

CATEGORY	A	B	C	D
LPV DA	3917-¾		250 (300-¾)	
LNAV/VNAV DA	3987-1		320 (400-1)	
LNAV MDA	4140-1	473 (500-1)	4140-1¼ 473 (500-1¼)	4140-1½ 473 (500-1½)
CIRCLING	4140-1	469 (500-1)	4140-1½ 469 (500-1½)	4240-2 569 (600-2)

SW-1, 11 MAR 2010 to 08 APR 2010

SW-1, 11 MAR 2010 to 08 APR 2010