

RNAV (GPS) Z RWY 11L

TUCSON INTL (TUS)




WAAS CH 82701 W11A	APP CRS 123°	Rwy Idg 10996 TDZE 2599 Apt Elev 2643
---------------------------------	------------------------	------------------------------------------------------------------

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 43°C (111°F). DME/DME RNP-0.3 NA.
⚠ For inoperative MALS/R, increase LPV visibility to RVR 5000 all Cats, LNAV/VNAV visibility Cat E to RVR 6000, LNAV visibility Cat E to 2 1/4.



MISSED APPROACH: Climb to 6000 (CAT E 8000) via direct CURGA and via 213° track to REBDE and via 303° track to TOYOP and hold.

ATIS 123.8 279.65	TUCSON APP CON 119.4 318.1	TUCSON TOWER 118.3 257.8	GND CON 124.4 348.6	CLNC DEL 126.65 326.2
-----------------------------	--------------------------------------	-------------------------------------------	-------------------------------	---------------------------------

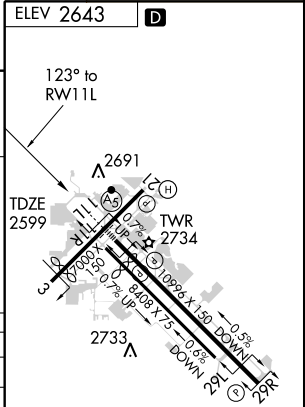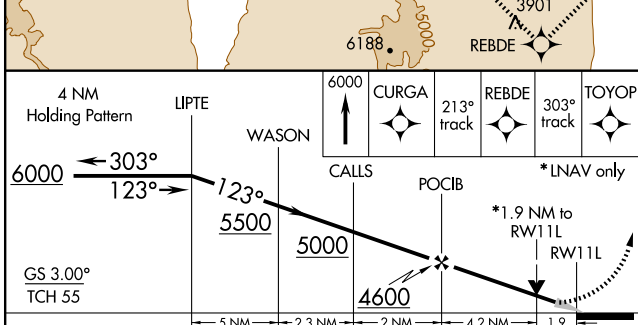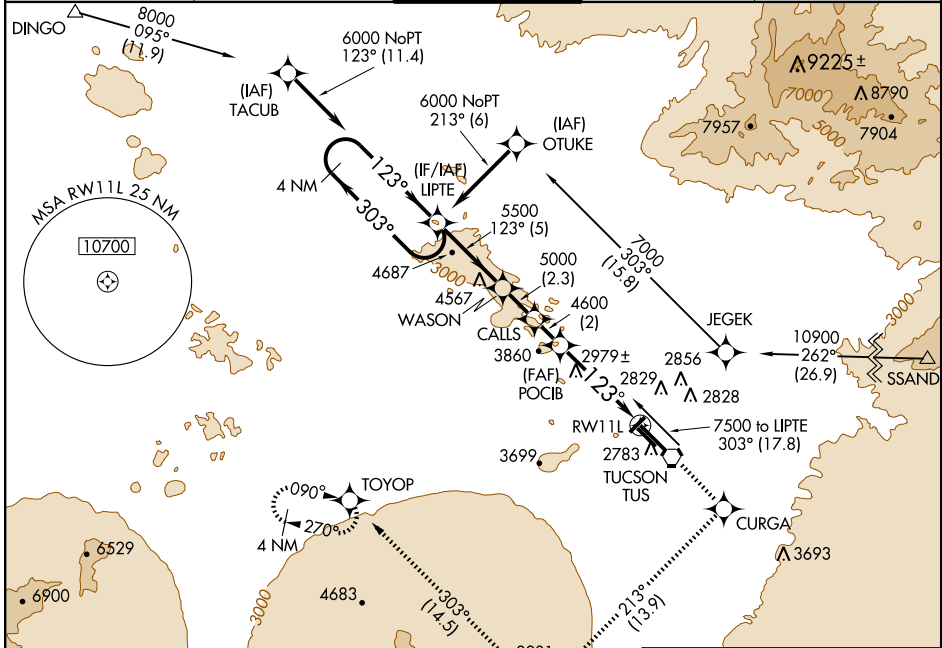

CATEGORY	A	B	C	D	E
LPV DA	2849/24		250 (300-1/2)		
LNAV/VNAV DA	2956/40		357 (400-3/4)		
LNAV MDA	3240/24	641 (600-1/2)	3240/60 641 (600-1 1/4)	3240-1 1/2 641 (600-1 1/2)	3240-1 3/4 641 (600-1 3/4)
CIRCLING	3240-1 597 (600-1)		3240-1 1/2 597 (600-1 1/2)	3240-2 597 (600-2)	3740-3 1097 (1100-3)

REIL Rwy 21
 REIL Rwys 29L and 29R
 (Daylight hours only)
 HIRL Rwy 11L-29R
 MIRL Rws 3-21 and 11R-29L

SW-4, 11 MAR 2010 to 08 APR 2010

SW-4, 11 MAR 2010 to 08 APR 2010