


# ILS or LOC RWY 21R


PASCO/ TRI-CITIES (PSC)

|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-PSC<br><b>108.7</b> | APP CRS<br><b>206°</b> | Rwy ldg<br>TDZE<br>Apt Elev | <b>7111</b><br><b>404</b><br><b>410</b> |
|---------------------------|------------------------|-----------------------------|---|

**⚠** If local altimeter setting not received, use Hermiston altimeter setting and increase all DAs/MDAs 100 feet.  
**⚠** DME from PSC VOR/DME. Simultaneous reception of I-PSC and PSC VOR/DME when DME required.  
 \*\*RVR 1800 authorized with the use of FD or AP or HUD to DA.  
 Circling to Rwy 03R NA at night.



**MALSR**  
  
**MISSED APPROACH:** Climb to 1200 then climbing left turn to 3200 via heading 050° and PSC VOR/DME R-087 to CITYS INT/ PSC 1.4 DME and hold.

|                        |   |  |                         |                          |                         |
|------------------------|---|--|-------------------------|--------------------------|-------------------------|
| ATIS*<br><b>125.65</b> | CHINOOK APP CON*<br><b>128.75 377.2</b> | TRI-CITIES TOWER*<br><b>135.3 (CTAF) 323.3</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>120.0</b> | UNICOM<br><b>122.95</b> |
|------------------------|---|--|-------------------------|--------------------------|-------------------------|

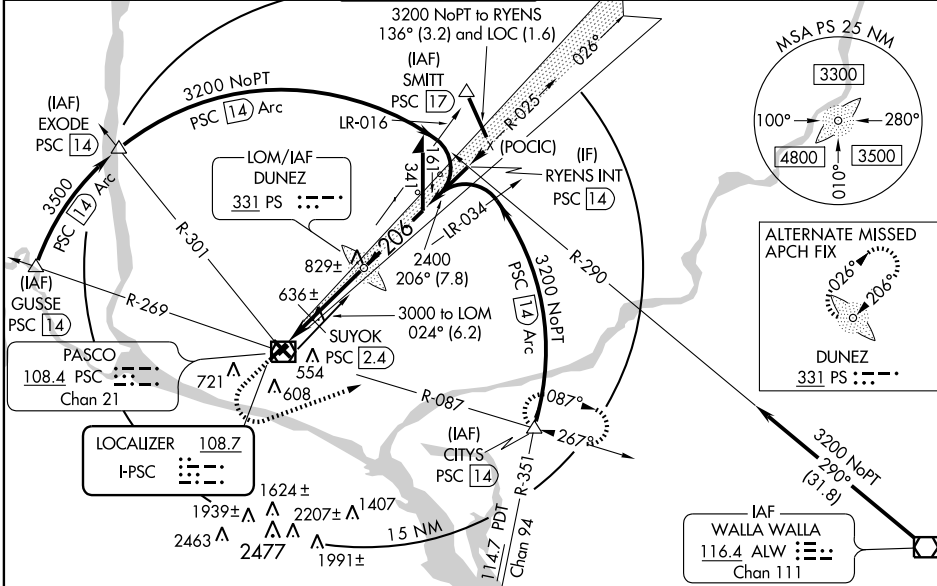

NW-1, 19 NOV 2009 to 17 DEC 2009

NW-1, 19 NOV 2009 to 17 DEC 2009

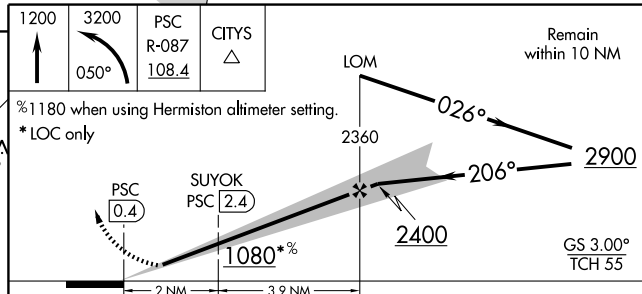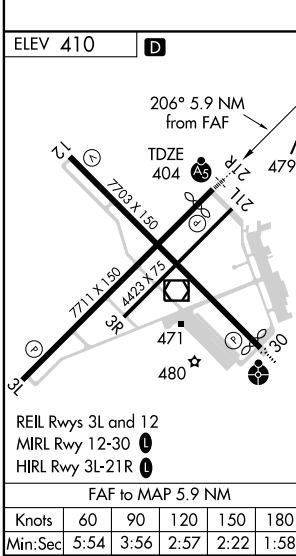

| CATEGORY           | A                    | B           | C                       | D                       |
|--------------------|----------------------|-------------|-------------------------|-------------------------|
| S-ILS 21R          | **604/24 200 (200-½) |             |                         |                         |
| S-LOC 21R          | 1080/24              | 676 (700-½) | 1080-1½<br>676 (700-1½) | 1080-1¾<br>676 (700-1¾) |
| CIRCLING           | 1080-1               | 670 (700-1) | 1080-2<br>670 (700-2)   | 1080-2¼<br>670 (700-2¼) |
| SUYOK FIX MINIMUMS |                      |             |                         |                         |
| S-LOC 21R          | 900/24               | 496 (500-½) | 900/40<br>496 (500-¾)   | 900/50<br>496 (500-1)   |
| CIRCLING           | 920-1                | 510 (600-1) | 920-1½<br>510 (600-1½)  | 1040-2<br>630 (700-2)   |