WAAS CH 86605 W30A	APP CRS 296°	Rwy Idg 7503 TDZE 405 Apt Elev 410

RNAV (GPS) RWY 30

PASCO/TRI-CITIES (PSC)

When local altimeter setting not received, use Hermiston altimeter setting and increase all DAs/MDAs 100 feet and all visibilities ½ mile.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
VDP and Baro-VNAV NA when using Hermiston altimeter setting.
Inoperative table does not apply. Circling to Rwy 3R NA at night.
Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

ODALS

MISSED APPROACH: Climb to 5200 direct DOPVE and via 265° track to PAIDS and hold, continue climb-in-hold to 5200.

ATIS ★	CHINOOK APP CON ★	TRI-CITIES TOWER ★	GND CON	CLNC DEL	UNICOM
125.65	128.75 377.2	135.3 (CTAF) L 323.3	121.8	120.0	122.95

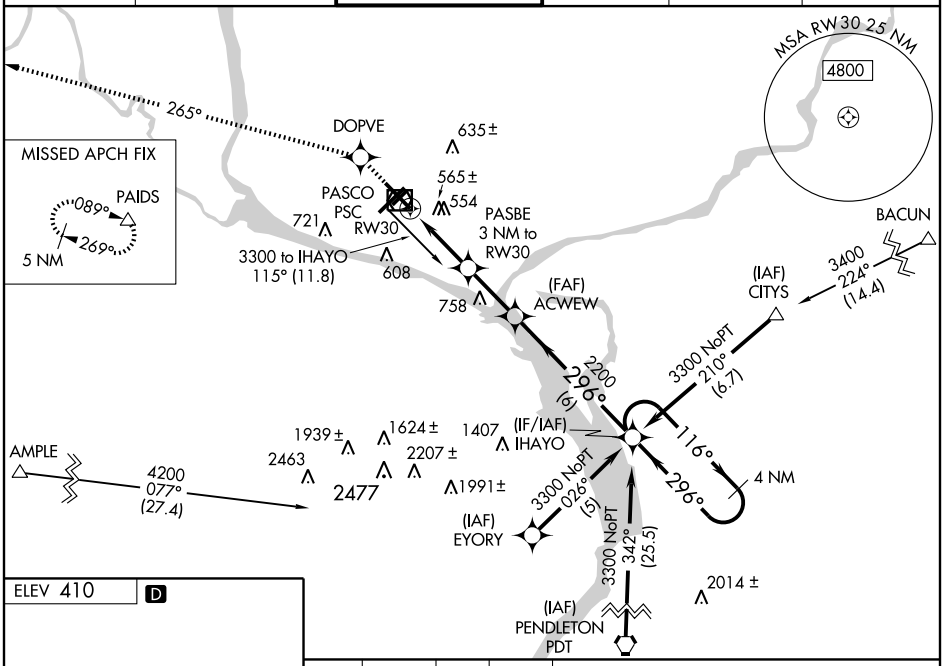

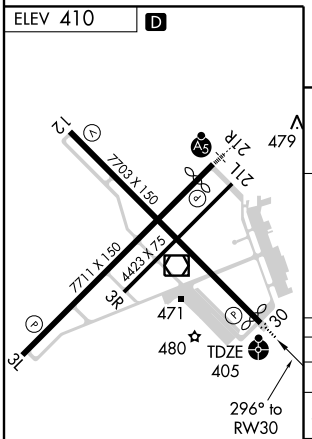

REIL Rwys 3L and 12
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L

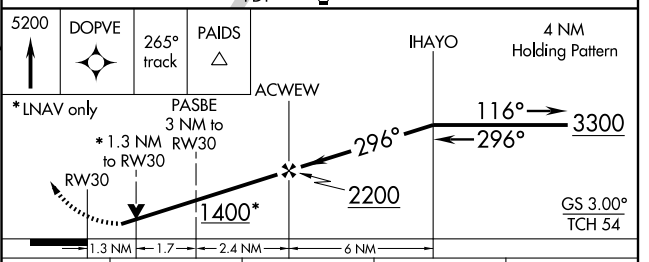

CATEGORY	A	B	C	D
LPV DA	777-1¼ 372 (400-1¼)			
LNAV/VNAV DA	913-1¾ 508 (600-1¾)			
LNAV MDA	880-1 475 (500-1)		880-1¼ 475 (500-1¼)	880-1½ 475 (500-1½)
CIRCLING	920-1 510 (600-1)		920-1½ 510 (600-1½)	1040-2 630 (700-2)

NW-1, 19 NOV 2009 to 17 DEC 2009
NW-1, 19 NOV 2009 to 17 DEC 2009