LOC I-SBD	APP CRS	Rwy Idg	10001
109.3	057°	TDZE	1091
		Apt Elev	1159

ILS or LOC Z RWY 6
SAN BERNARDINO INTL (SBD)

When local altimeter setting not received, use Ontario Intl altimeter setting and increase all DA to 1662 feet and all visibilities ¼ mile. Increase all MDA 80 feet and S-LOC Cat C/D visibilities ¼ mile and Circling Cat C ¼ mile and Cat D ½ mile. Circling NA north of Rwy 6-24. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2700, then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.

ATIS	SOCAL APP CON	SAN BERNARDINO TOWER ★	GND CON	UNICOM
124.175	127.25 318.2	119.45 (CTAF) L	121.8	122.975

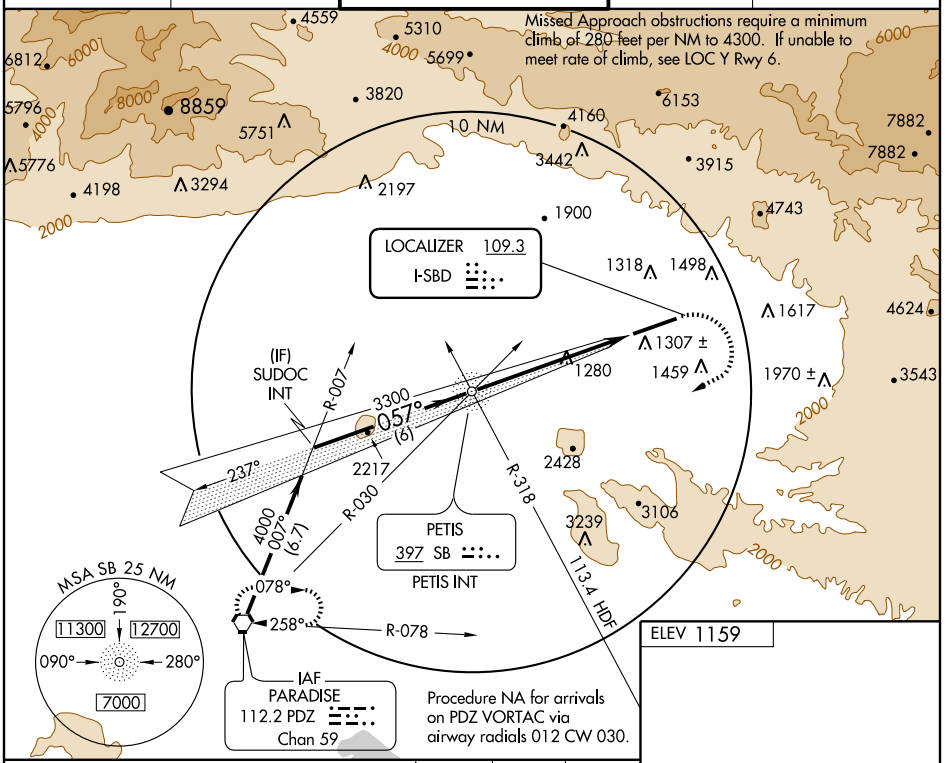

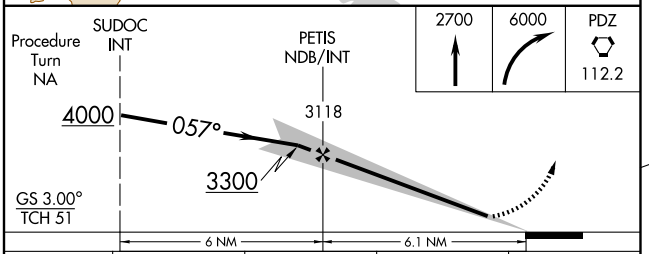



CATEGORY	A	B	C	D
S-ILS 6	1589-1¾ 498 (500-1¾)			
S-LOC 6	1640-1¼ 549 (600-1¼)		1640-1½ 549 (600-1½)	1640-1¾ 549 (600-1¾)
CIRCLING	1640-1¼ 481 (500-1¼)		1660-1½ 501 (600-1½)	1820-2 661 (700-2)

HIRL Rwy 6-24 L

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

SW-3, 11 MAR 2010 to 08 APR 2010
SW-3, 11 MAR 2010 to 08 APR 2010