


ILS or LOC RWY 2

NEW HAVEN / TWEED-NEW HAVEN (HVN)

LOC/DME I-HVN 109.1 Chan 28	APP CRS 016°	Rwy Idg 5600 TDZE 6 Apt Elev 12
--	------------------------	--

When local altimeter setting not received, use Islip altimeter setting. Inoperative table does not apply.		MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct MAD VOR/DME and hold.		
		ATIS 133.65	NEW YORK APP CON 124.075 343.65	TWEED-NEW HAVEN TOWER * 124.8 (CTAF)
		UNICOM 122.95		

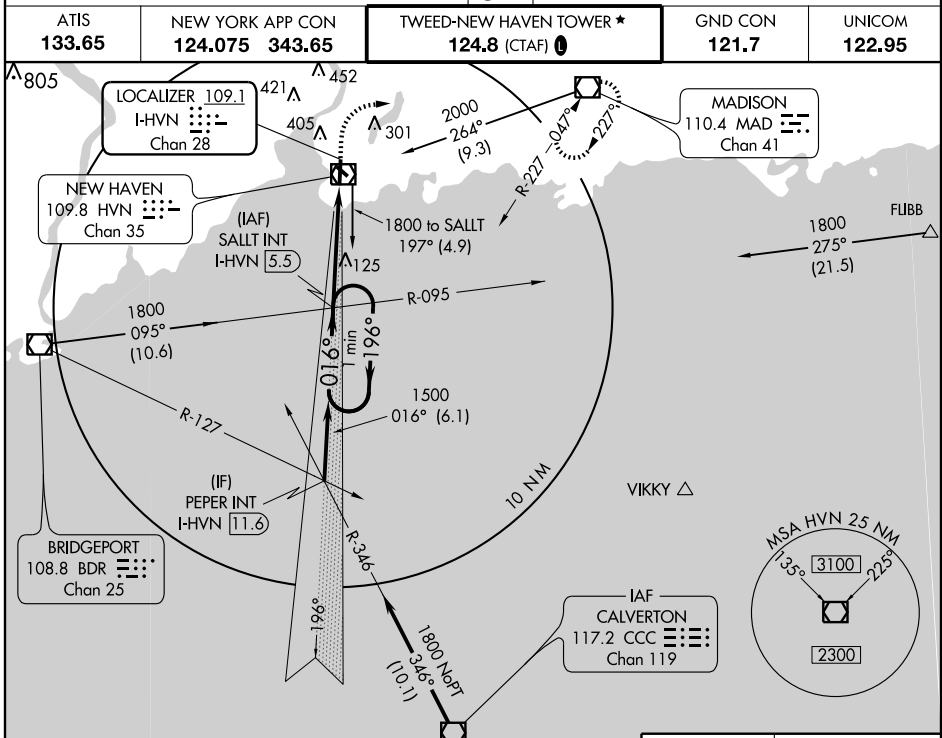

NE-1, 19 NOV 2009 to 17 DEC 2009

NE-1, 19 NOV 2009 to 17 DEC 2009

One Minute Holding Pattern	SALLT INT I-HVN 5.5	600	2000	MAD
	1500	1500	1500	I-HVN 1.1
GS 3.00° TCH 50	1500	1500	1500	4.5 NM
CATEGORY	A	B	C	D
S-ILS 2		297/50	291 (300-1)	
S-LOC 2	400/50	394 (400-1)		400/60 394 (400-1½)
CIRCLING	720 - 1	708 (800-1)	720 - 2 708 (800-2)	720 - 2¼ 708 (800-2¼)
ISLIP ALTIMETER SETTING MINIMUMS				
S-ILS 2		378/60	372 (400-1½)	
S-LOC 2	480/50	474 (500-1)	480/60 474 (500-1½)	480-1½ 474 (500-1½)
CIRCLING	800 - 1¼	788 (800-1¼)	800 - 2¼ 788 (800-2¼)	800 - 2½ 788 (800-2½)

