


RNAV (GPS) RWY 2


NEW HAVEN / TWEED-NEW HAVEN (HVN)

WAAS CH 86999	APP CRS 016°	Rwy Idg TDZE Apt Elev	5600 6 12
-------------------------	------------------------	-----------------------------	--------------------------------------

⚠ When local altimeter setting not received, use Islip altimeter setting and increase all DAs to 405 feet and all MDAs 100 feet.
⚠ Baro-VNAV NA when using Islip altimeter setting.
 Baro-VNAV NA below -1.5°C (5°F). Inoperative table does not apply.
 Procedure NA at night. DME/DME RNP -0.3 NA.



MALSF
 MISSED APPROACH: Climb to 2000 direct HIMUL and right turn via 113° track to MAD VOR/DME and hold.

ATIS 133.65	NEW YORK APP CON 124.075 343.65	TWEED-NEW HAVEN TOWER * 124.8 (CTAF) 0	GND CON 121.7	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

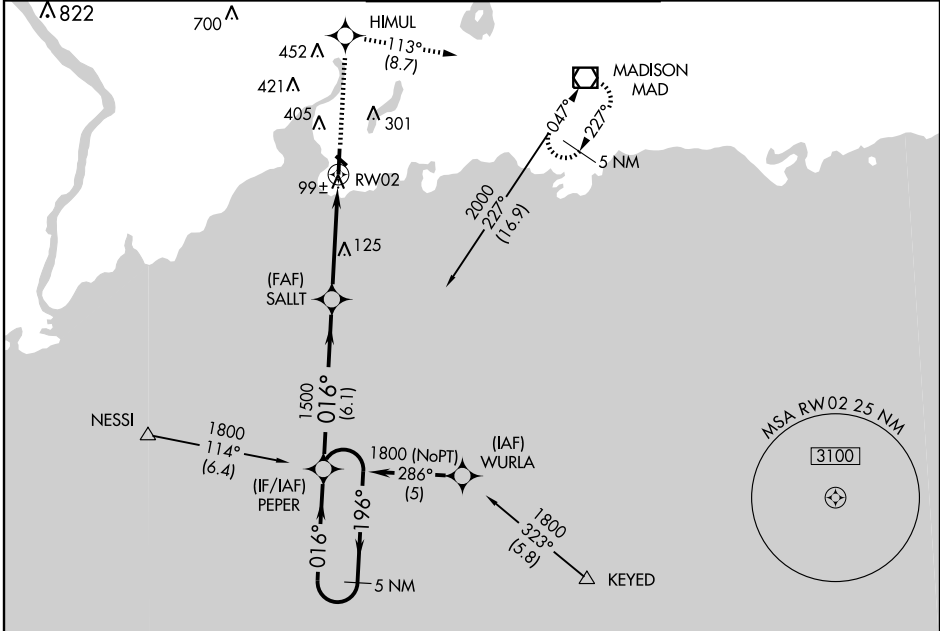

NE-1, 19 NOV 2009 to 17 DEC 2009

NE-1, 19 NOV 2009 to 17 DEC 2009

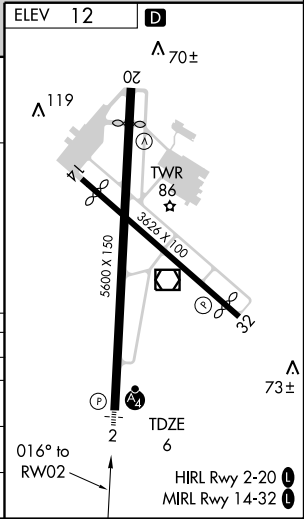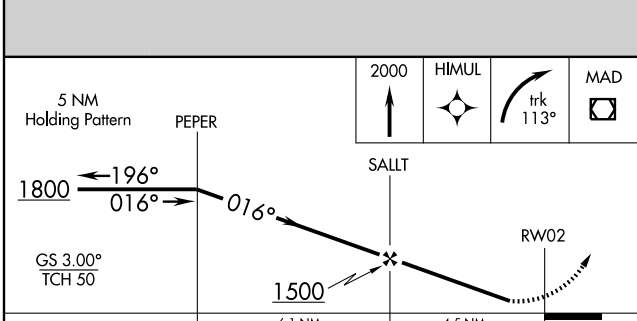

CATEGORY	A	B	C	D
LPV DA		324/50	318 (400-1)	
LNAV/VNAV DA		364/60	358 (400-1¼)	
LNAV MDA	460/50	454 (500-1)	460/60 454 (500-1¼)	460-1½ 454 (500-1½)
CIRCLING	720 - 1¼	708 (800-1¼)	720 - 2 708 (800-2)	720 - 2¼ 708 (800-2¼)