AL-671 (FAA)

ILS or LOC RWY 2

NEW HAVEN / TWEED-NEW HAVEN (HVN)

LOC/DME I-HVN	APP CRS	Rwy Idg 5600
109.1	016°	TDZE 6
Chan 28		Apt Elev 12

When local altimeter setting not received, use Islip altimeter setting. Inoperative table does not apply.

MALSF

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct MAD VOR/DME and hold.

ATIS	NEW YORK APP CON	TWEED-NEW HAVEN TOWER ★	GND CON	UNICOM
133.65	124.075 343.65	124.8 (CTAF) L	121.7	122.95

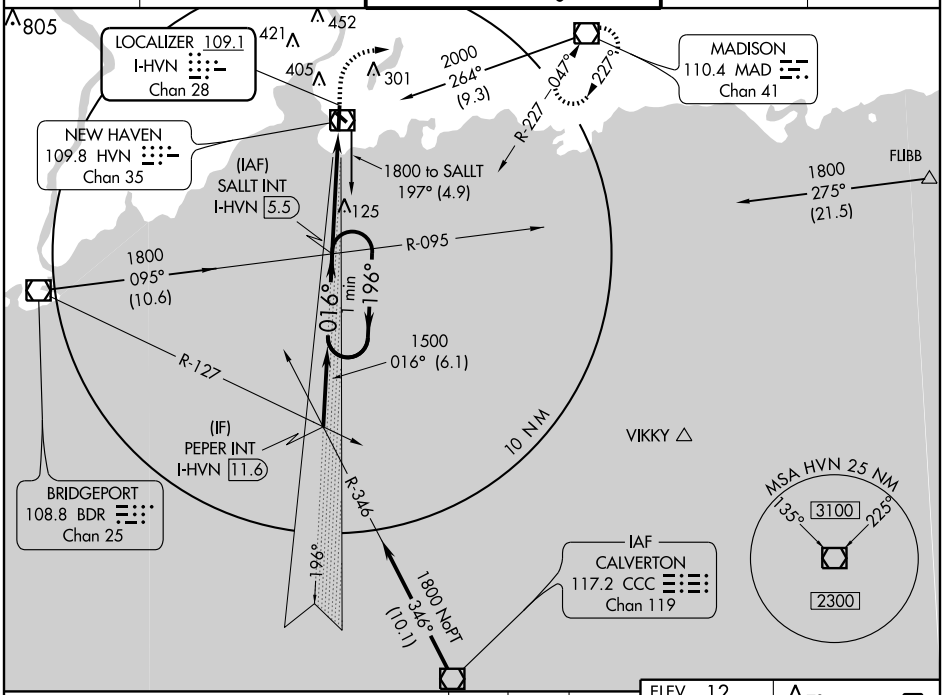

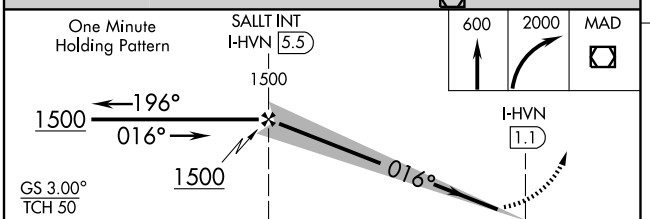

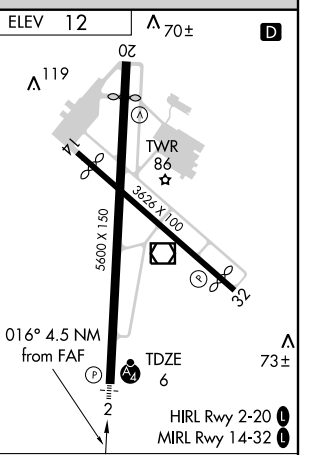

CATEGORY	A	B	C	D
S-ILS 2		297/50	291 (300-1)	
S-LOC 2	400/50	394 (400-1)		400/60 394 (400-1¼)
CIRCLING	720 - 1	708 (800-1)	720 - 2 708 (800-2)	720 - 2¼ 708 (800-2¼)
ISLIP ALTIMETER SETTING MINIMUMS				
S-ILS 2		378/60	372 (400-1¼)	
S-LOC 2	480/50	474 (500-1)	480/60 474 (500-1¼)	480-1½ 474 (500-1½)
CIRCLING	800 - 1¼	788 (800-1¼)	800 - 2¼ 788 (800-2¼)	800 - 2½ 788 (800-2½)

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

NE-1, 11 MAR 2010 to 08 APR 2010

41°16'N - 72°53'W

NEW HAVEN / TWEED-NEW HAVEN (HVN)
ILS or LOC RWY 2