WAAS CH 45508 W36A	APP CRS 359°	Rwy Idg 6500 TDZE 400 Apt Elev 406

RNAV (GPS) RWY 36

OWENSBORO-DAVIESS COUNTY (OWB)

T A Baro-VNAV NA below -15°C (5°F). DME/DME RNP-0.3 NA. When control tower closed, use Evansville altimeter setting, and increase all DAs/MDAs 60 feet and all visibilities ¼ mile. Baro-VNAV and VDP NA with Evansville altimeter setting. For inoperative MALSR, increase LPV all Cats visibility to 1 and LNAV Cat D visibilitity to 1¼.

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct HUMAD and hold.

ASOS	EVANSVILLE APP CON ★	OWENSBORO TOWER ★	GND CON	UNICOM
124.325	126.4 226.4	120.7 (CTAF) (L) 251.15	121.7	122.95

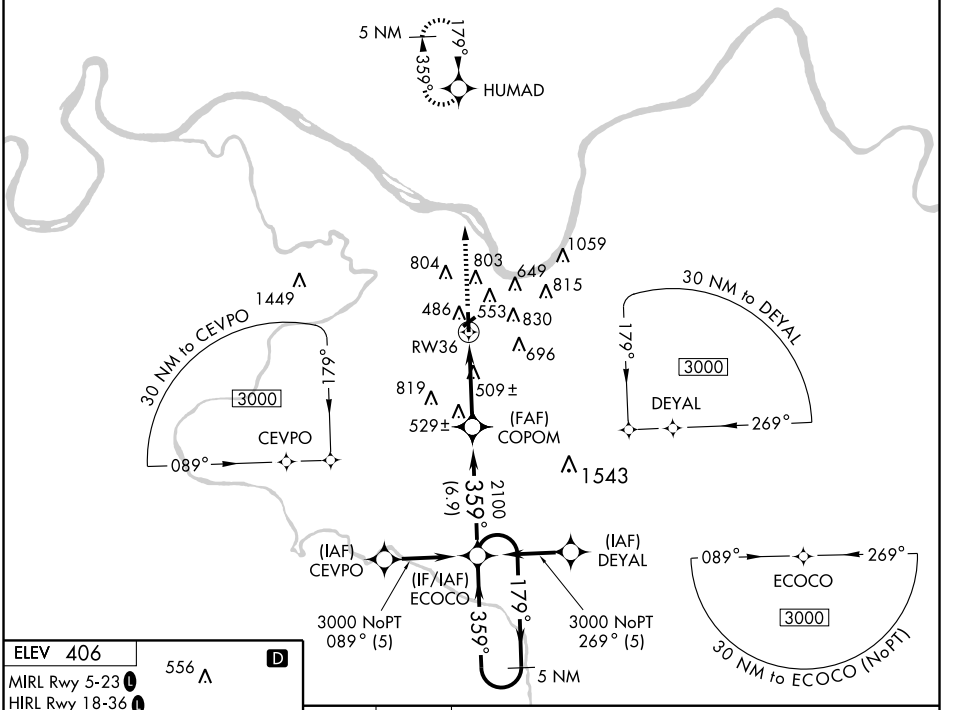

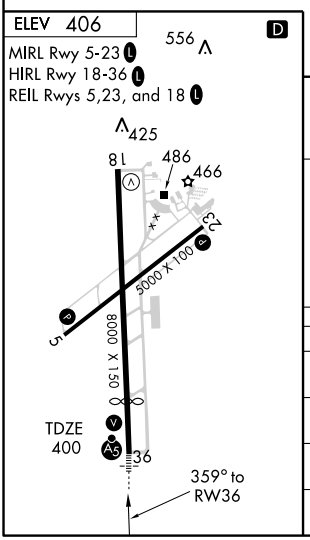

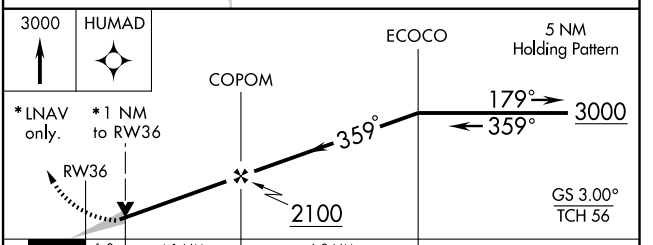

CATEGORY	A	B	C	D
LPV DA	650-½ 250 (300-½)			
LNAV/VNAV DA	820-1 420 (500-1)			
LNAV MDA	760-½ 360 (400-½)			760-1 360 (400-1)
CIRCLING	860-1½ 454 (500-1½)		1120-2 714 (800-2)	1140-2¼ 734 (800-2¼)

SE-1, 19 NOV 2009 to 17 DEC 2009
SE-1, 19 NOV 2009 to 17 DEC 2009