

RNAV (GPS) Y RWY 27R

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)


WAAS CH 61002 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	8394 7 9
--	------------------------	-----------------------------	-------------------------------------

- T** For inoperative MALS, increase LNAV Cat. A and B visibility to RVR 5000.
- A** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA.
- W**





MISSED APPROACH:
Climb to 4000 direct PIONN and hold, continue climb-in-hold to 4000.

ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4
----------------------	---------------------------------------	--	-------------------------	--------------------------

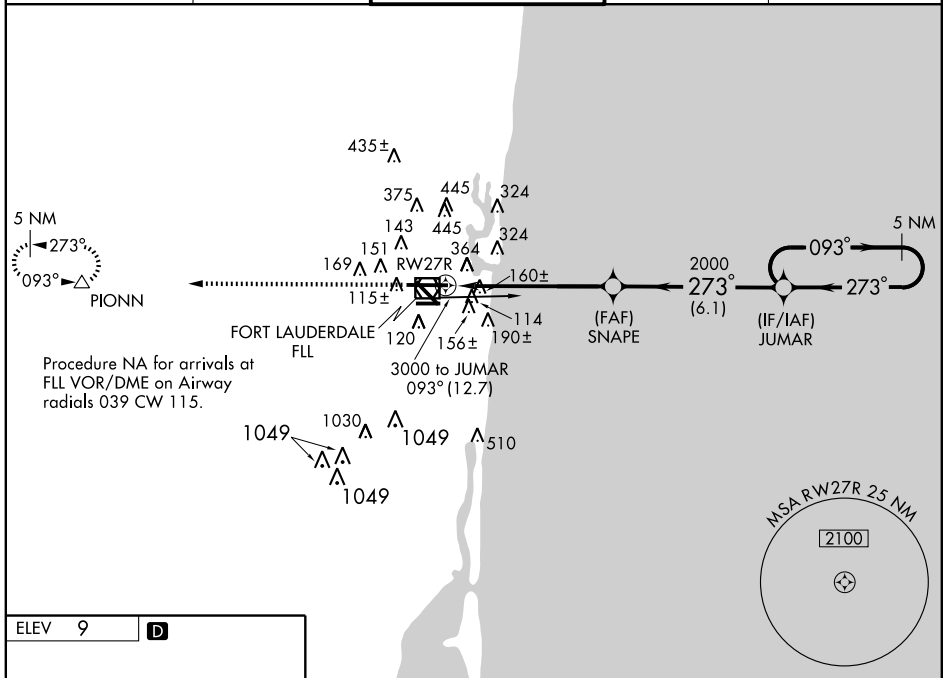

SE-3, 11 MAR 2010 to 08 APR 2010

SE-3, 11 MAR 2010 to 08 APR 2010

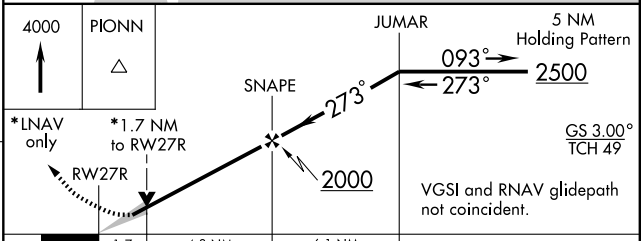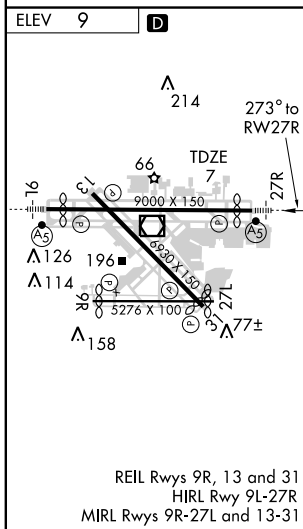

CATEGORY	A	B	C	D
LPV DA	307/40		300 (300-¾)	
LNAV/VNAV DA	704-2		697 (700-2)	
LNAV MDA	620/40	613 (700-¾)	620/60 613 (700-1¼)	620-1½ 613 (700-1½)
CIRCLING	680-1	671 (700-1)	680-2 671 (700-2)	700-2¼ 691 (700-2¼)