| WAAS CH 45703 W29A | APP CRS 287° | Rwy Idg 5400 TDZE 42 Apt Elev 43 |
|---|---|---|

# RNAV (GPS) RWY 29
LAFAYETTE RGNL (LFT)

Baro-VNAV NA when using Acadiana Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. If local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DAs 29 feet/MDAs 40 feet.

ASR

MISSED APPROACH: Climb to 2800 direct SUVDE and via 274° track to RAYNE and hold.

| ATIS | LAFAYETTE APP CON ★ | LAFAYETTE TOWER ★ | GND CON | CLNC DEL | UNICOM |
|---|---|---|---|---|---|
| 134.05 | 121.1 363.0 | 118.5 (CTAF) C 257.8 | 121.8 | 125.55 | 122.95 |

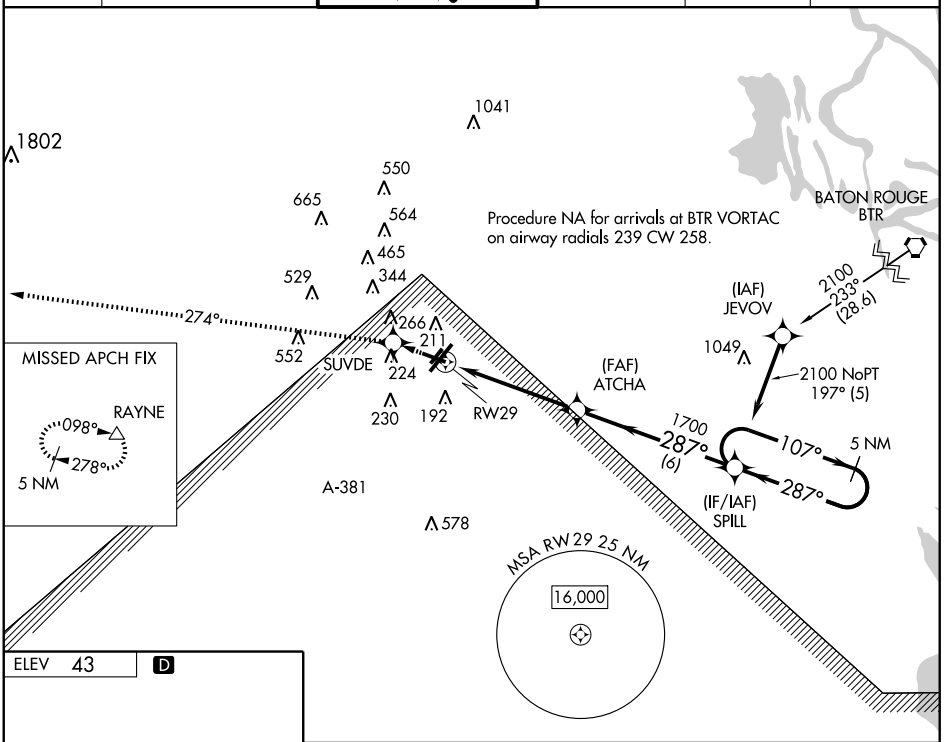


SC-4, 19 NOV 2009 to 17 DEC 2009

SC-4, 19 NOV 2009 to 17 DEC 2009

ELEV 43 D




REIL Rwys 4L, 4R,11, 22R and 29
MIRL Rwys 11-29 and 4L-22R
HIRL Rwy 4R-22L

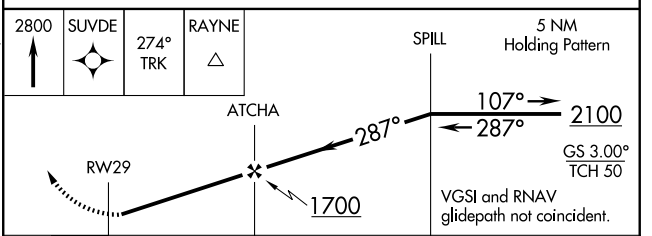


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 294-1 252 (300-1) | | | |
| LNAV/VNAV DA | 462-1½ 420 (500-1½) | | | |
| LNAV MDA | 400-1 358 (400-1) | | | 400-1¼ 358 (400-1¼) |
| CIRCLING | 540-1 497 (500-1) | 580-1 537 (600-1) | 580-1½ 537 (600-1½) | 660-2 617 (700-2) |