

ILS or LOC/DME RWY 4R



LAFAYETTE RGNL (LFT)

LOC/DME I-TYN 110.9 Chan 46	APP CRS 036°	Rwy Idg TDZE Apt Elev	7651 40 43
--	------------------------	-----------------------------	---------------------------------------

⚠ ADF required. If local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DAs 29 feet and all MDAs 40 feet.
ASR VDP NA when using Acadiana Rgnl altimeter setting. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2100 direct LAFFS LOM and hold.

ATIS 134.05	LAFAYETTE APP CON * 121.1 363.0	LAFAYETTE TOWER * 118.5 (CTAF) 257.8	GND CON 121.8	CLNC DEL 125.55	UNICOM 122.95
-----------------------	---	--	-------------------------	---------------------------	-------------------------

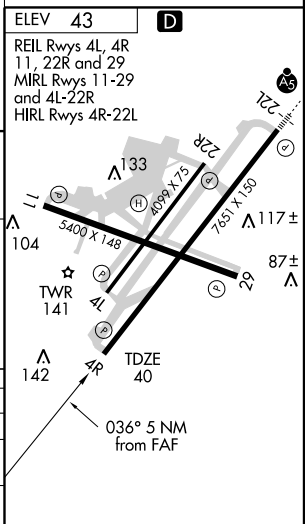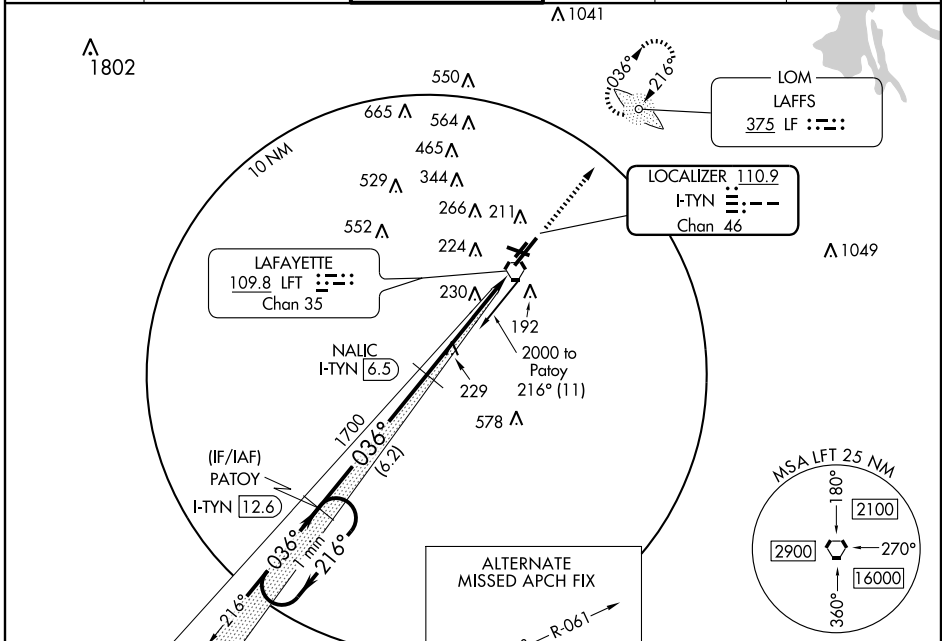

CATEGORY	A	B	C	D
S-ILS 4R	240-3/4 200 (200-3/4)			
S-LOC 4R	480-1 440 (500-1)	480-1 440 (500-1 1/2)	480-1 1/2 440 (500-1 1/2)	480-1 1/2 440 (500-1 1/2)
CIRCLING	540-1 497 (500-1)	580-1 537 (600-1)	580-1 1/2 537 (600-1 1/2)	660-2 618 (700-2)

SC-4, 19 NOV 2009 to 17 DEC 2009

SC-4, 19 NOV 2009 to 17 DEC 2009