WAAS CH 45703 W29A	APP CRS 287°	Rwy Idg 5400 TDZE 42 Apt Elev 43

RNAV (GPS) RWY 29

LAFAYETTE RGNL (LFT)

Baro-VNAV NA when using Acadiana Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. If local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DAs 29 feet/MDAs 40 feet.

ASR

MISSED APPROACH: Climb to 2800 direct SUVDE and via 274° track to RAYNE and hold.

ATIS	LAFAYETTE APP CON ★	LAFAYETTE TOWER ★	GND CON	CLNC DEL	UNICOM
134.05	121.1 363.0	118.5 (CTAF) C 257.8	121.8	125.55	122.95

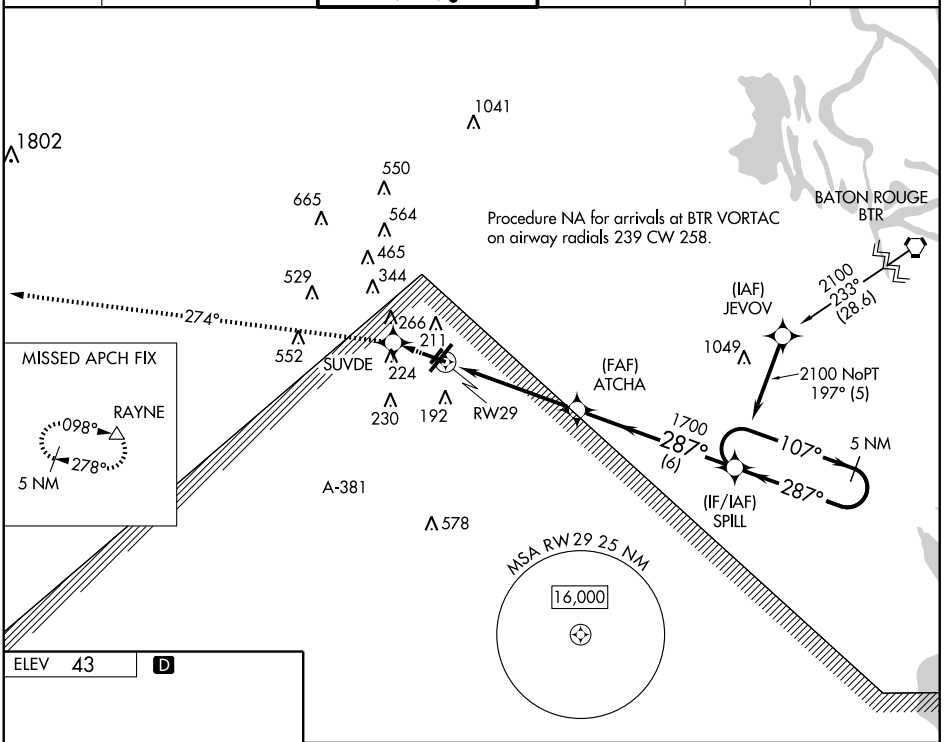

ELEV 43 D



REIL Rwys 4L, 4R,11, 22R and 29
MIRL Rwys 11-29 and 4L-22R
HIRL Rwy 4R-22L

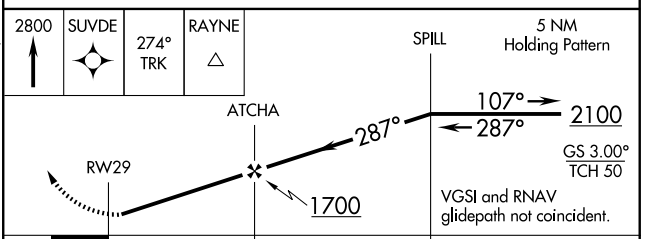

CATEGORY	A	B	C	D
LPV DA	294-1 252 (300-1)			
LNAV/VNAV DA	462-1½ 420 (500-1½)			
LNAV MDA	400-1 358 (400-1)			400-1¼ 358 (400-1¼)
CIRCLING	540-1 497 (500-1)	580-1 537 (600-1)	580-1½ 537 (600-1½)	660-2 617 (700-2)

SC-4, 11 MAR 2010 to 08 APR 2010
SC-4, 11 MAR 2010 to 08 APR 2010