LOC I-MQY	APP CRS	Rwy Idg	8048
111.1	321°	TDZE	517
		Apt Elev	543

ILS RWY 32
SMYRNA (MQY)

Obtain local altimeter setting on CTAF; when not received use Nashville altimeter setting.
ADF REQUIRED

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct SWZ NDB and hold.

ASOS	NASHVILLE APP CON	SMYRNA TOWER ★	GND CON	CLNC DEL	NASHVILLE CLNC DEL	UNICOM
119.125	118.4 360.7	118.5 (CTAF) L 233.1	121.4	121.4	121.7 (When tower closed)	122.95

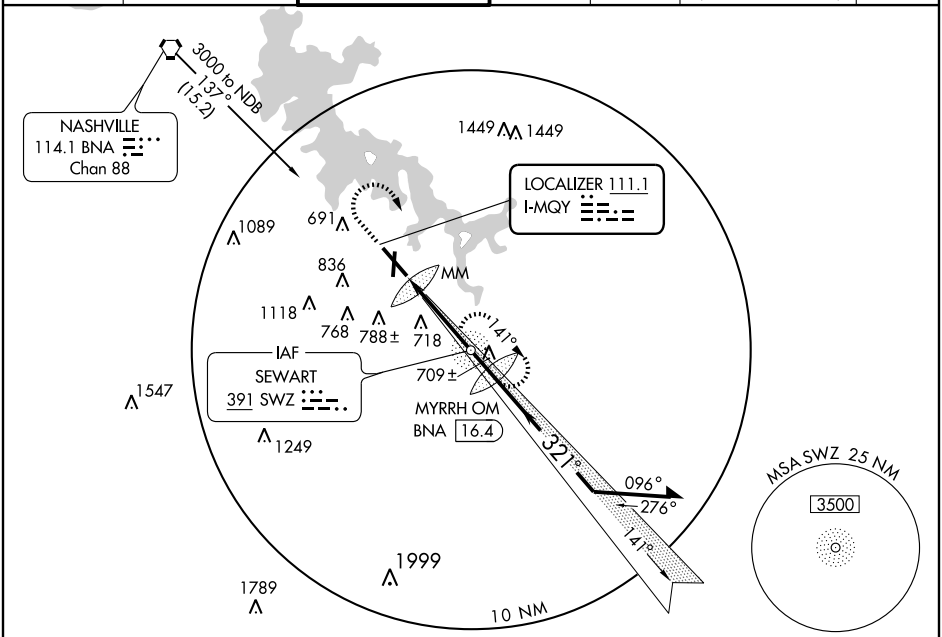

ELEV 543

REIL Rwy 14 L
HIRL Rwy 14-32 L
MIRL Rwy 1-19 L
REIL Rwys 1, 19, and 32

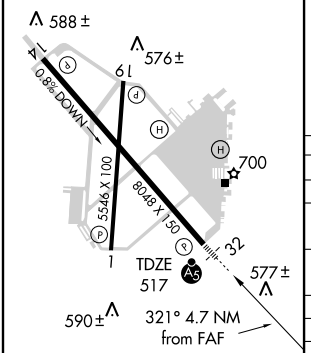

FAF to MAP 4.7 NM					
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

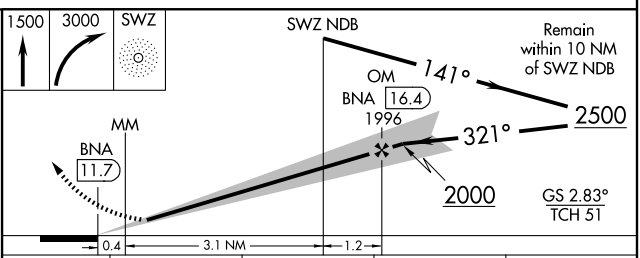

CATEGORY	A	B	C	D
S-ILS 32	717-½ 200 (200-½)			
S-LOC 32	960-½ 443 (500-½)		960-¾ 443 (500-¾)	960-1 443 (500-1)
CIRCLING	1080-1 537 (600-1)		1120-1½ 577 (600-1½)	1160-2 617 (700-2)
NASHVILLE ALTIMETER SETTING MINIMUMS				
S-ILS 32	816-½ 299 (300-½)			
S-LOC 32	1060-½ 543 (600-½)		1060-1 543 (600-1)	1060-1¼ 543 (600-1¼)
CIRCLING	1180-1 637 (700-1)		1220-2 677 (700-2)	1260-2¼ 717 (800-2¼)

SE-1, 11 MAR 2010 to 08 APR 2010