

ILS or LOC RWY 10

CAPE GIRARDEAU RGNL (CGI)





LOC I-CGI 109.5 Chan 32	APP CRS 105°	Rwy Idg TDZE Apt Elev	6499 338 342
---	------------------------	-----------------------------	---

▼ When local altimeter setting not received, use Cairo Rgnl altimeter setting and increase all DA 48 feet, increase all MDA 60 feet, increase ZAXOD fix minimums Circling Cats C, D visibility 1/4 mile. VDP NA when using Cairo Rgnl altimeter setting. ADF Required.

▲ MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct DUTCH LOM/I-CGI 7.2 DME and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER * 125.525 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

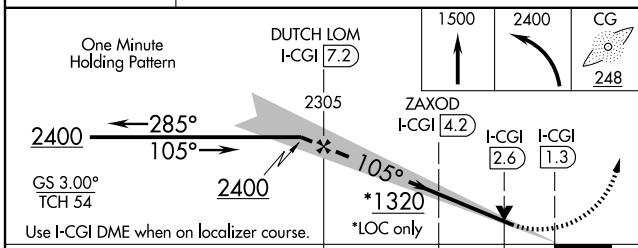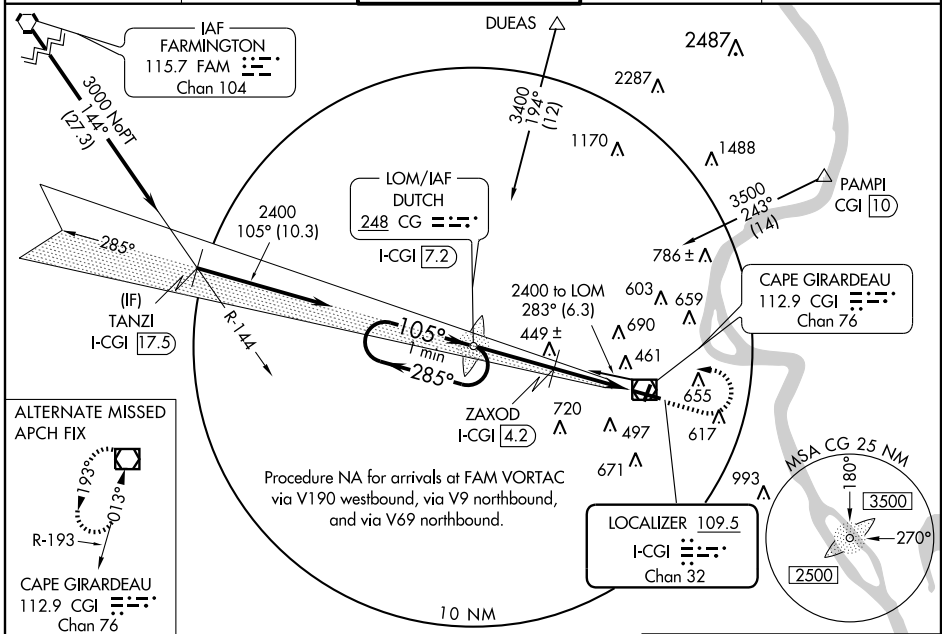

CATEGORY	A	B	C	D
S-ILS 10		538-1/2	200 (200-1/2)	
S-LOC 10	1320-3/4 982 (1000-3/4)	1320-1 982 (1000-1)	1320-2 1/2	982 (1000-2 1/2)
CIRCLING	1320-1 1/4 978 (1000-1 1/4)	1320-1 1/2 978 (1000-1 1/2)	1320-3	978 (1000-3)
ZAXOD FIX MINIMUMS				
S-LOC 10	860-1/2	522 (600-1/2)	860-1 522 (600-1)	860-1 1/4 522 (600-1 1/4)
CIRCLING	860-1 518 (600-1)	960-1 618 (700-1)	960-1 3/4 618 (700-1 3/4)	1000-2 658 (700-2)

MIRL Rwy 2-20
HIRL Rwy 10-28

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

NC-3, 11 MAR 2010 to 08 APR 2010

NC-3, 11 MAR 2010 to 08 APR 2010