WAAS	APP CRS	Rwy Idg	8400
CH 78201	305°	TDZE	867
W30A		Apt Elev	873

RNAV (GPS) RWY 30
WATERLOO RGNL (ALO)

T Inoperative table does not apply to LPV, LNAV/VNAV and LNAV Cat C.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). If local altimeter setting not received, use Independence altimeter setting and increase all DAs/MDAs 80 feet. DME/DME-0.3 RNP NA. Baro-VNAV and VDP NA when using Independence atimeter setting.

MALSR

MISSED APPROACH: Climb to 3400 direct EYUCE and hold.

ATIS	WATERLOO APP CON ★	WATERLOO TOWER ★	GND CON	UNICOM
120.65	118.9 251.15	125.075 (CTAF) L 257.8	121.9 269.1	122.95

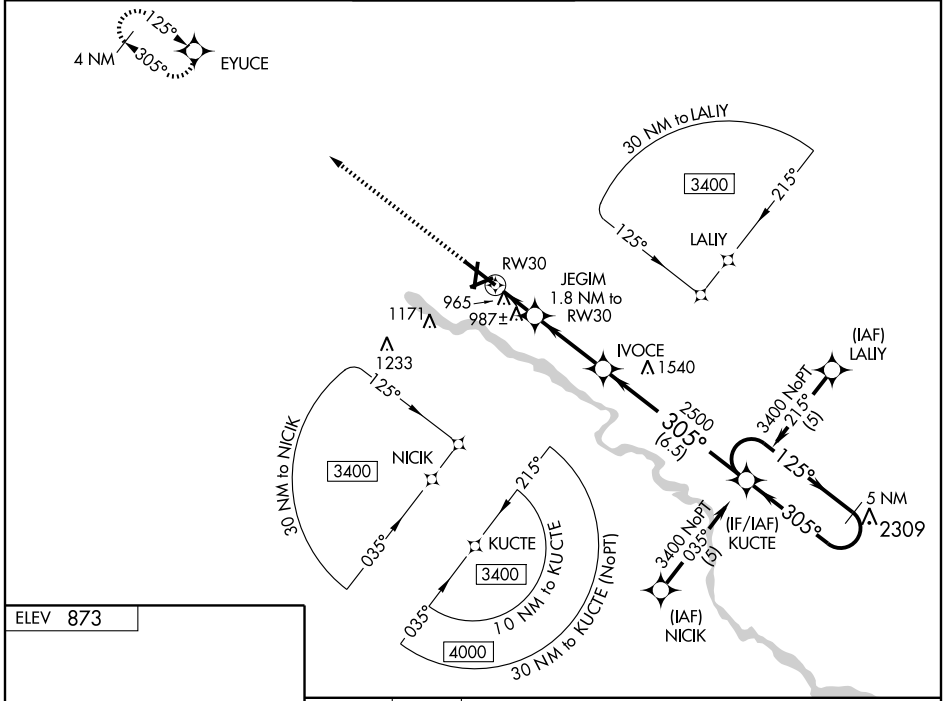



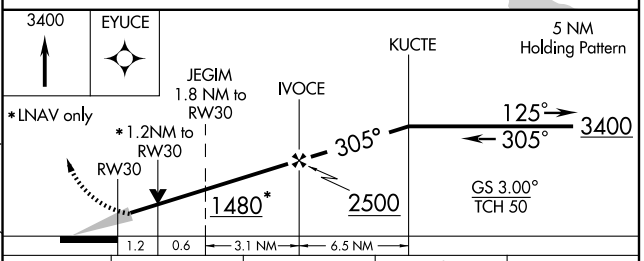

CATEGORY	A	B	C	D
LPV DA	1117-¾ 250 (300-¾)			
LNAV/VNAV DA	1299-1½ 432 (500-1½)			
LNAV MDA	1300- ¾ 433 (500-¾)		1300-1¼ 433 (500-1¼)	1300-1½ 433 (500-1½)
CIRCLING	1380-1½ 507 (600-1½)			1480-2 607 (700-2)

MIRL Rwy 6-24
MIRL Rwy 18-36 L
HIRL Rwy 12-30 L
REIL Rwys 6, 18, 24, and 36

NC-3, 11 MAR 2010 to 08 APR 2010
NC-3, 11 MAR 2010 to 08 APR 2010