

RNAV (GPS) RWY 29

GAINESVILLE RGNL (GNV)


WAAS CH 60916 W29A	APP CRS 286°	Rwy Idg TDZE Apt Elev	7504 122 152
--	------------------------	-----------------------------	---

▽ DME/DME RNP-0.3 NA. Baro-VNAV NA below -15°C (5°F). Inoperative table does not apply to LNAV Cat D. For inoperative MALSR increase LPV all Cats visibility to 1.

MALSR
ASR



MISSED APPROACH: Climb to 2100 direct LOLRY and hold.

ATIS 127.15	JACKSONVILLE APP CON 121.3 269.325	GAINESVILLE TOWER★ 119.55 (CTAF) 0 353.7	GND CON 121.7
-----------------------	--	--	-------------------------

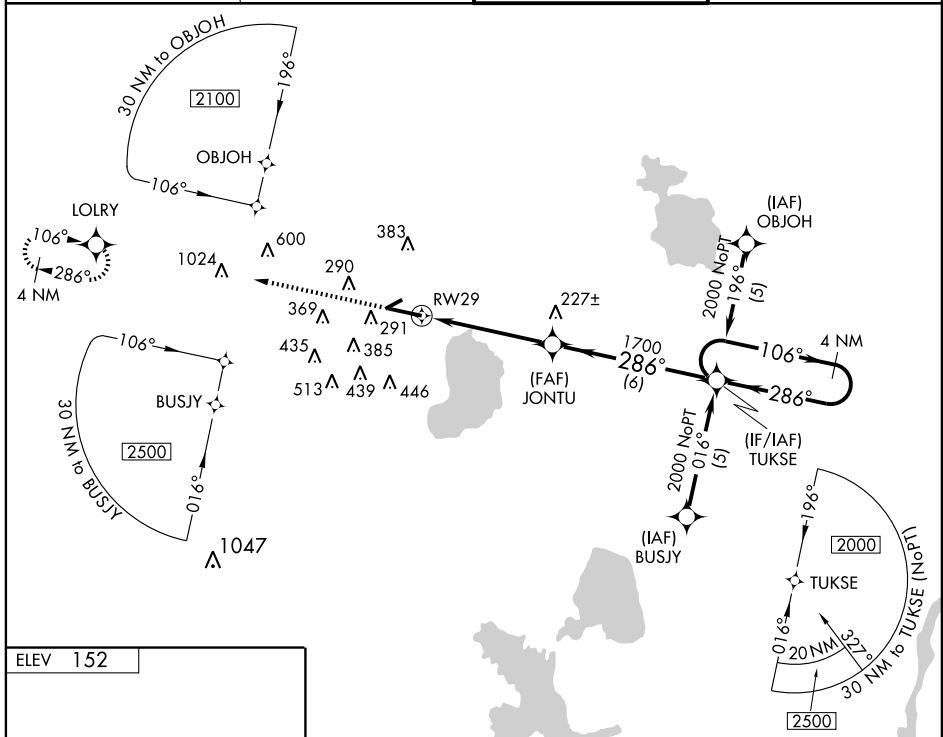

SE-3, 11 MAR 2010 to 08 APR 2010

SE-3, 11 MAR 2010 to 08 APR 2010

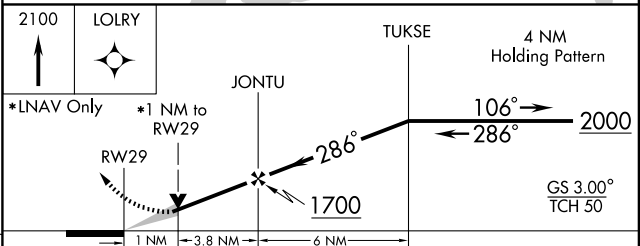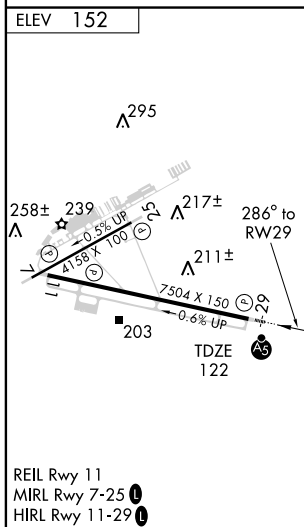

CATEGORY	A	B	C	D
LPV DA	420-1/2 298 (300-1/2)			
LNAV/VNAV DA	480-3/4 358 (400-3/4)			
LNAV MDA	460-1/2 338 (400-1/2)			460-1 338 (400-1)
CIRCLING	620-1 1/4 468 (500-1 1/4)		620-1 1/2 468 (500-1 1/2) 740-2 588 (600-2)	