

# ILS or LOC RWY 17




GREENVILLE/ MAJORS (GVT)

|                           |                        |                        |
|---------------------------|------------------------|------------------------|
| LOC I-GVT<br><b>110.5</b> | APP CRS<br><b>176°</b> | Rwy Idg<br><b>8030</b> |
|                           |                        | TDZE<br><b>534</b>     |
|                           |                        | Apt Elev<br><b>535</b> |

**T** When local altimeter setting not received, use Terrell altimeter setting and increase DA 64 feet and all MDA 80 feet and increase S-ILS 17 all Cats visibility 1/4 mile, S-LOC 17 Cat A, B, C and D visibility 1/4 mile, Cat E visibility 1/2 mile, and circling Cat C and E visibility 1/4 mile. Inoperative table does not apply to S-LOC 17 Cat C. ADF Required.

**MALS**  
MISSED APPROACH: Climb to 1000 then climbing right turn to 2300 direct GV LOM and hold, continue climb-in-hold to 2300.

|                          |   |  |                               |                         |
|--------------------------|---|--|-------------------------------|-------------------------|
| AWOS-3<br><b>133.425</b> | FORT WORTH CENTER<br><b>132.85 360.75</b> | MAJORS TOWER ★<br><b>118.65 (CTAF) 0 385.425</b> | GND CON<br><b>121.7 335.8</b> | UNICOM<br><b>122.95</b> |
|--------------------------|---|--|-------------------------------|-------------------------|

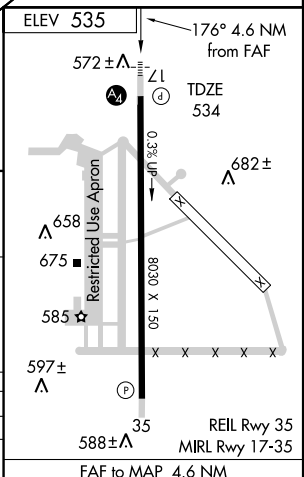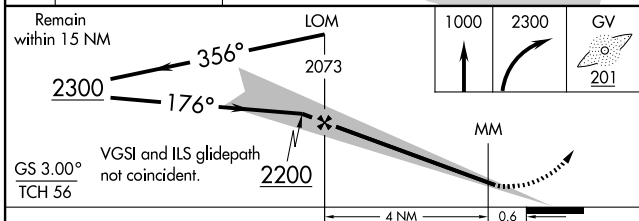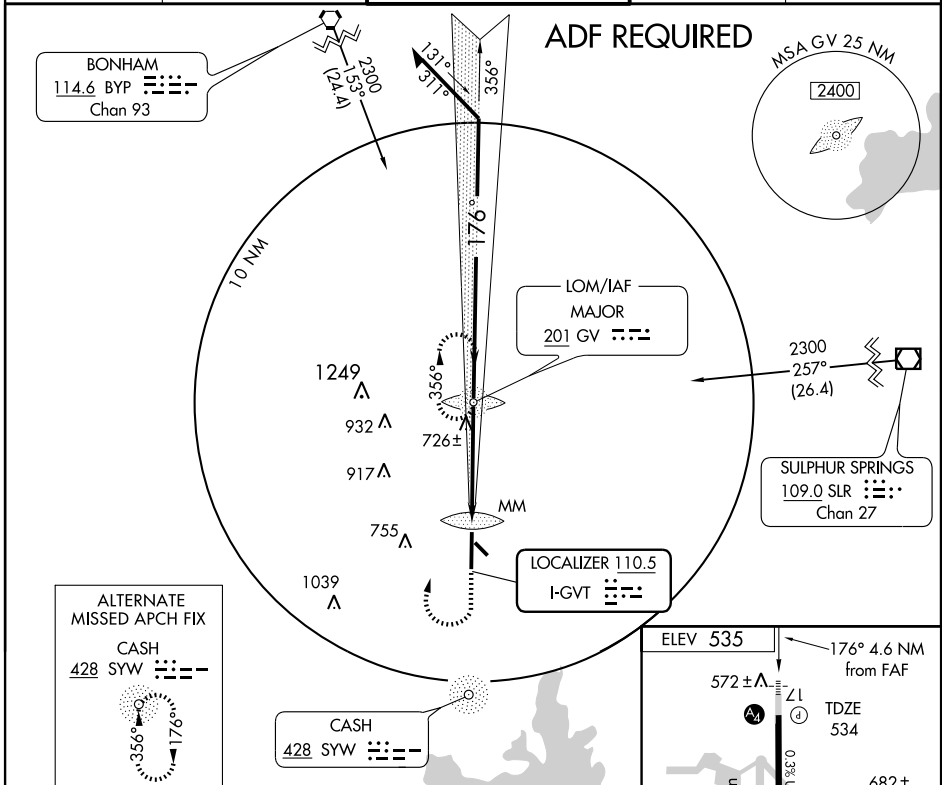

| CATEGORY | A                      | B                  | C                          | D                          | E                          |
|----------|------------------------|--------------------|----------------------------|----------------------------|----------------------------|
| S-ILS 17 | 734-3/4 200 (200-3/4)  |                    |                            |                            |                            |
| S-LOC 17 | 1060-3/4 526 (600-3/4) | 1060-1 525 (600-1) | 1060-1 1/2 526 (600-1 1/2) | 1060-1 3/4 526 (600-1 3/4) |                            |
| CIRCLING | 1060-1 525 (600-1)     | 1060-1 525 (600-1) | 1060-1 1/2 525 (600-1 1/2) | 1100-2 565 (600-2)         | 1280-2 3/4 745 (800-2 3/4) |

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 4:36 | 3:04 | 2:18 | 1:50 | 1:32 |

SC-2, 11 MAR 2010 to 08 APR 2010

SC-2, 11 MAR 2010 to 08 APR 2010