

# ILS or LOC RWY 17




GREENVILLE/ MAJORS (GVT)

LOC I-GVT <b>110.5</b>	APP CRS <b>176°</b>	Rwy Idg <b>8030</b>
		TDZE <b>534</b>
		Apt Elev <b>535</b>

**T** When local altimeter setting not received, use Terrell altimeter setting and increase DA 64 feet and all MDA 80 feet and increase S-ILS 17 all Cats visibility 1/4 mile, S-LOC 17 Cat A, B, C and D visibility 1/4 mile, Cat E visibility 1/2 mile, and circling Cat C and E visibility 1/4 mile. Inoperative table does not apply to S-LOC 17 Cat C. ADF Required.

**MALS**  
MISSED APPROACH: Climb to 1000 then climbing right turn to 2300 direct GV LOM and hold, continue climb-in-hold to 2300.

AWOS-3 <b>133.425</b>	FORT WORTH CENTER <b>132.85 360.75</b>	MAJORS TOWER ★ <b>118.65 (CTAF) 0 385.425</b>	GND CON <b>121.7 335.8</b>	UNICOM <b>122.95</b>
--------------------------	---	--	-------------------------------	-------------------------

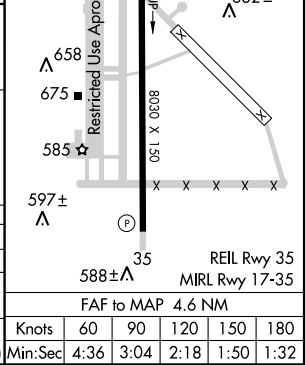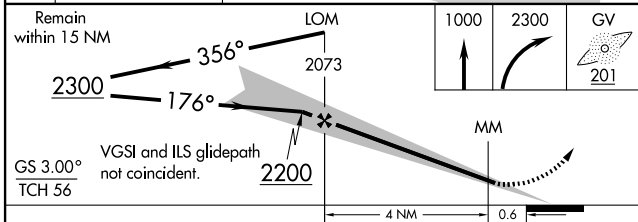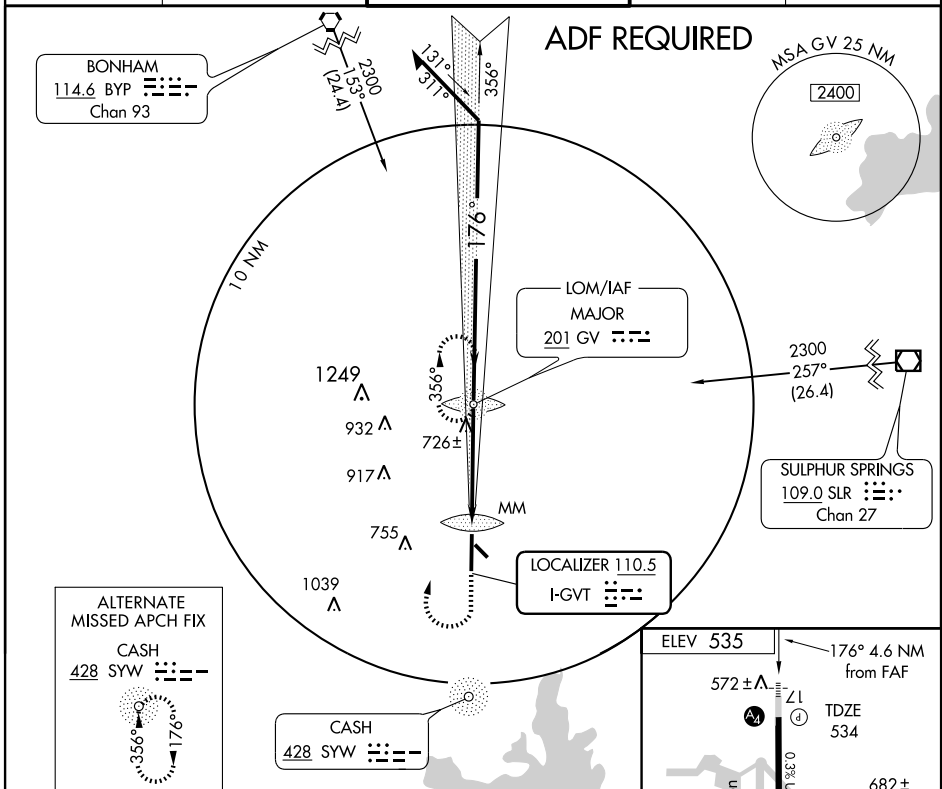

CATEGORY	A	B	C	D	E
S-ILS 17	734-3/4 200 (200-3/4)				
S-LOC 17	1060-3/4 526 (600-3/4)	1060-1 526 (600-1 1/2)	1060-1 1/2 525 (600-1 1/2)	1060-1 3/4 526 (600-1 3/4)	
CIRCLING	1060-1 525 (600-1)	1060-1 525 (600-1 1/2)	1100-2 565 (600-2)	1280-2 3/4 745 (800-2 3/4)	

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

SC-2, 19 NOV 2009 to 17 DEC 2009

SC-2, 19 NOV 2009 to 17 DEC 2009