

# RNAV (GPS) RWY 23



MADISONVILLE MUNI (2I0)

|  |                        |   |             |
|--|------------------------|---|-------------|
| WAAS<br>CH <b>77911</b><br><b>W23A</b> | APP CRS<br><b>235°</b> | Rwy Idg<br>TDZE <b>418</b><br>Apt Elev <b>439</b> | <b>6050</b> |
|--|------------------------|---|-------------|


**NA** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Evansville Rgnl altimeter setting and increase all DA/MDA 100 feet, increase LPV and LNAV/VNAV all Cats., LNAV Cats. C and D visibility ¼ mile. Baro VNAV and VDP NA when using Evansville Rgnl altimeter setting.

**MISSED APPROACH:**  
Climb to 2600 direct CELES and hold.

|                          |  |                          |                                 |
|--------------------------|--|--------------------------|---------------------------------|
| AWOS-3<br><b>126.475</b> | EVANSVILLE APP CON *<br><b>126.4 226.4</b> | CLNC DEL<br><b>120.1</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|--------------------------|--|--------------------------|---------------------------------|

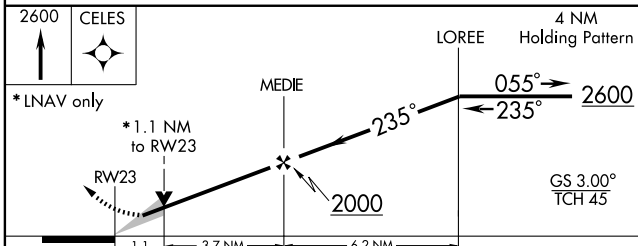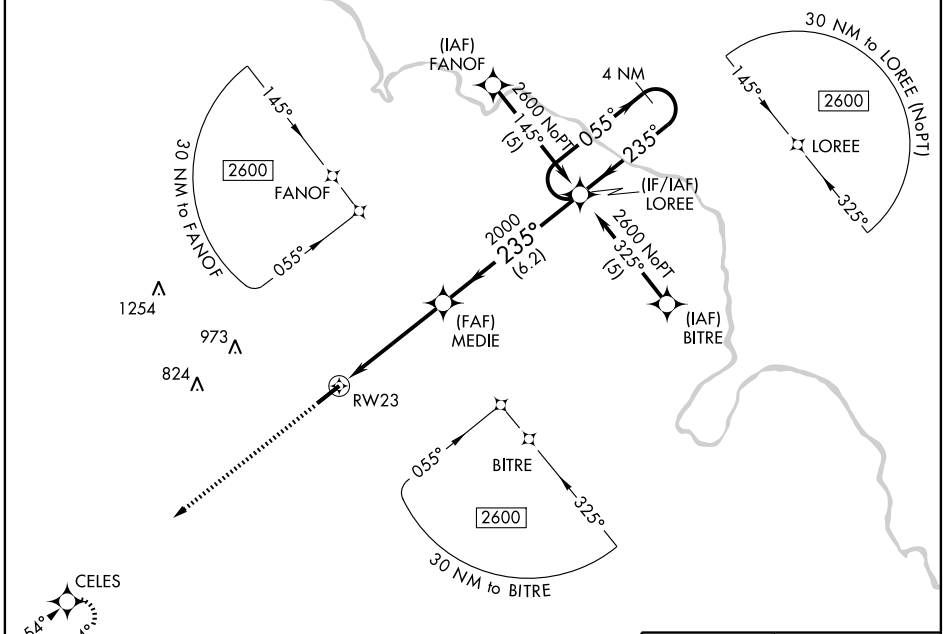

| CATEGORY     | A                    | B                    | C                      | D                      |
|--------------|----------------------|----------------------|------------------------|------------------------|
| LPV DA       |                      | 740-1¼               | 322 (400-1¼)           |                        |
| LNAV/VNAV DA |                      | 819-1½               | 401 (400-1½)           |                        |
| LNAV MDA     | 880-1                | 900-1                | 900-1½                 | 800-1¼<br>382 (400-1¼) |
| CIRCLING     | 880-1<br>441 (500-1) | 900-1<br>461 (500-1) | 900-1½<br>461 (500-1½) | 1000-2<br>561 (600-2)  |

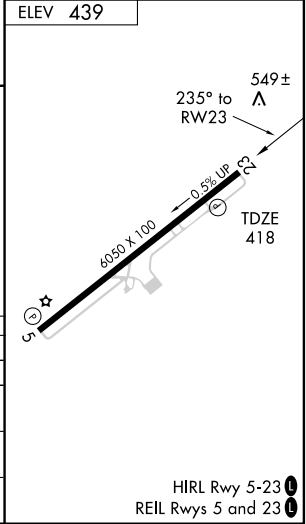

SE-1, 19 NOV 2009 to 17 DEC 2009

SE-1, 19 NOV 2009 to 17 DEC 2009