| WAAS | APP CRS | Rwy Idg | 4098 |
|---|---|---|---|
| CH 82700 | 356° | TDZE | 1086 |
| W36A | | Apt Elev | 1096 |

# RNAV (GPS) RWY 36

OLATHE/JOHNSON COUNTY EXECUTIVE (OJC)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 95°C (203°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LPV, LNAV/VNAV and LNAV all Cats visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 3100 direct ILLOW and hold.

| ATIS | KANSAS CITY APP CON | EXECUTIVE TOWER* | GND CON | UNICOM |
|---|---|---|---|---|
| 119.35 | 118.9 294.7 | 126.0(CTAF) L 225.4 | 121.6 | 122.95 |

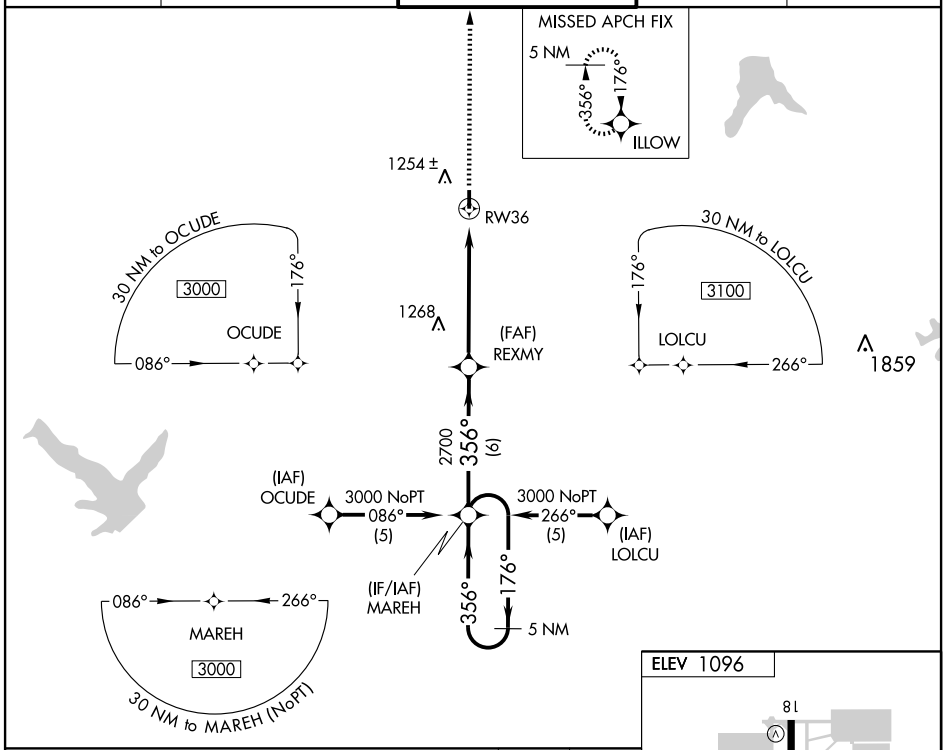


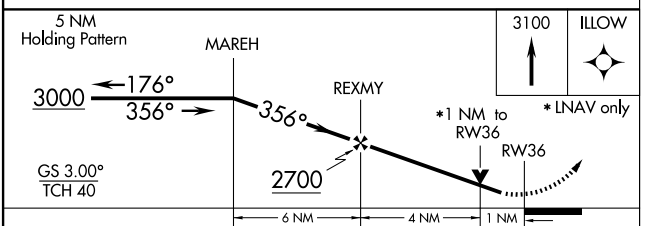


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1336-¾ 250 (300-¾) | | | NA |
| LNAV/VNAV DA | 1355-¾ 269 (300-¾) | | | NA |
| LNAV MDA | 1400-¾ 314 (400-¾) | | | NA |
| CIRCLING | 1540-1 444 (500-1) | 1560-1 464 (500-1) | 1560-1½ 464 (500-1½) | NA |

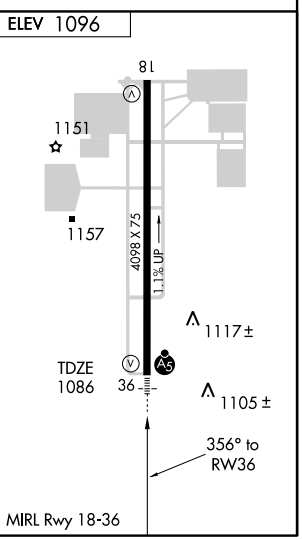




NC-2, 11 MAR 2010 to 08 APR 2010
NC-2, 11 MAR 2010 to 08 APR 2010