WAAS CH 40025 W35D	APP CRS 354°	Rwy Idg 13401 TDZE 563 Apt Elev 607

RNAV (GPS) RWY 35C

DALLAS-FORT WORTH INTL (DFW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). For inoperative ALSF, increase LNAV/VNAV all Cats visibility to RVR 6000. DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 4000 direct BOSSI and hold.

ATIS ARR	ATIS DEP	REGIONAL APP CON	DFW TOWER	GND CON	CLNC DEL
123.775	135.925	127.075	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25

RADAR REQUIRED

MISSED APCH FIX

5 NM 354° 174° BOSSI

958 1016 810 845 742 661 990 791 RW35C 1049 770± 734 354° 1049

(FAF) JOBBS 2100 (3) DAYZZ 3000 354° (6.3) TUFFO 5000 354° (3.2) (IF) RAYMA 2549

MSA RW35C 25 NM 3600

ELEV 607 D

Rwy 13L-31R 9000 X 200

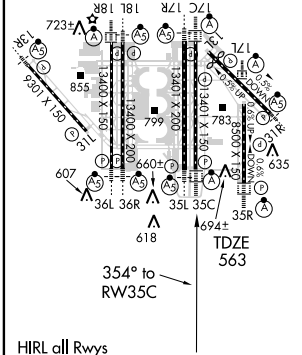

HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

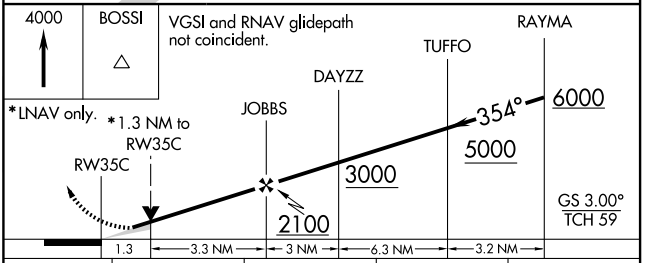

CATEGORY	A	B	C	D
LPV DA	813/24 250 (300-½)			
LNAV/VNAV DA	931/40 368 (400-¾)			
LNAV MDA	1040/24 477 (500-½)		1040/40 477 (500-¾)	1040/50 477 (500-1)

SC-2, 19 NOV 2009 to 17 DEC 2009
SC-2, 19 NOV 2009 to 17 DEC 2009