

RNAV (GPS) RWY 36



NEW ROADS/FALSE RIVER RGNL (H.Z.R.)

WAAS CH 42607 W36A	APP CRS 360°	Rwy Idg TDZE Apt Elev	5003 37 40
--	------------------------	-----------------------------	---------------------------------------


▼ Inoperative table does not apply. BARO-VNAV NA.
▲ NA Use Baton Rouge altimeter setting; when not received, use Lafayette Rgnl altimeter setting and increase all DA 43 feet and all MDA 60 feet, increase LPV and LNAV/VNAV all Cats and Circling Cat C visibility 1/4 mile.

ODALS
MISSED APPROACH: Climb to 1900 direct FENPU and hold.

BATON ROUGE ASOS 125.2	BATON ROUGE APP CON ★ 120.3 278.3	GCO 135.075	UNICOM 122.8 (CTAF) 0
----------------------------------	---	-----------------------	---------------------------------

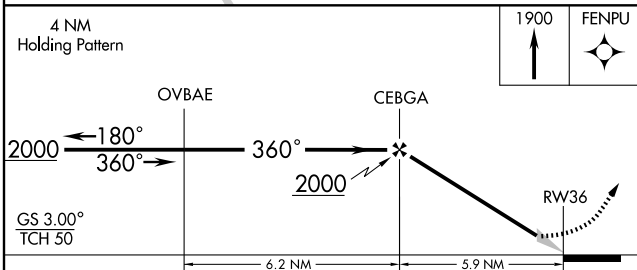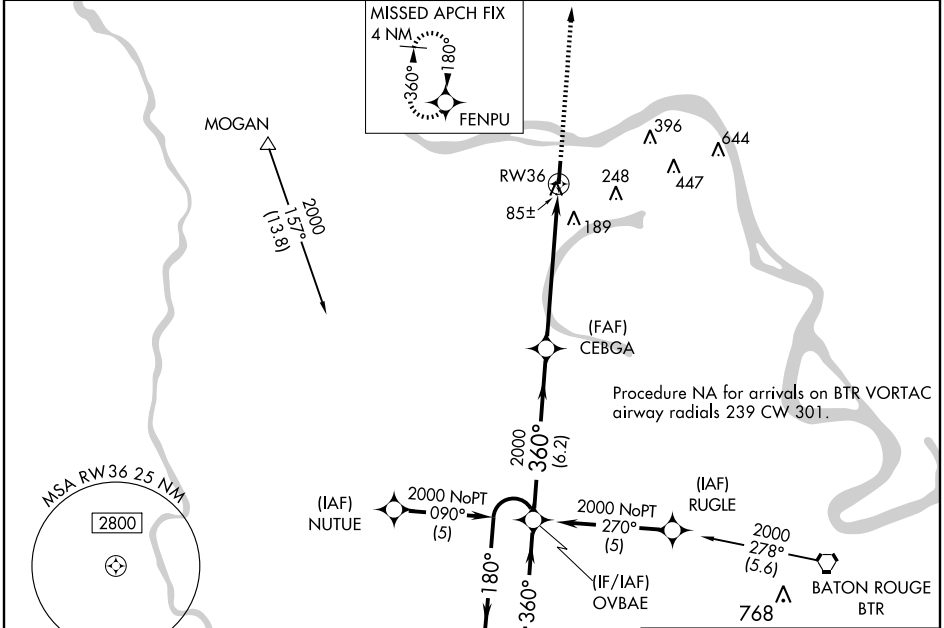

CATEGORY	A	B	C	D
LPV DA	358-1		321 (400-1)	
LNAV/VNAV DA	396-1 1/4		359 (400-1 1/4)	
LNAV MDA	560-1	523 (600-1)	560-1 1/2 523 (600-1 1/2)	560-1 1/4 523 (600-1 1/4)
CIRCLING	560-1	520 (600-1)	600-1 1/2 560 (600-1 1/2)	600-2 560 (600-2)

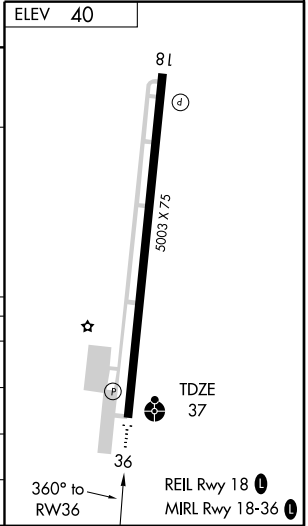

SC-4, 11 MAR 2010 to 08 APR 2010

SC-4, 11 MAR 2010 to 08 APR 2010