

LOC I-UXL 109.3	APP CRS 146°	Rwy Idg 5001 TDZE 10 Apt Elev 10
---------------------------	------------------------	---


LOC RWY 15

SULPHUR/SOUTHLAND FIELD (UXL)

⚠ Inoperative table does not apply to S-15 Cat C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase all MDA 20 feet.



ODALS MISSED APPROACH: Climb to 500 then climbing right turn to 2400 direct AUR NDB and hold, continue climb-in-hold to 2400.

AWOS-3 118.175	LAKE CHARLES APP CON* 119.35 282.3	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

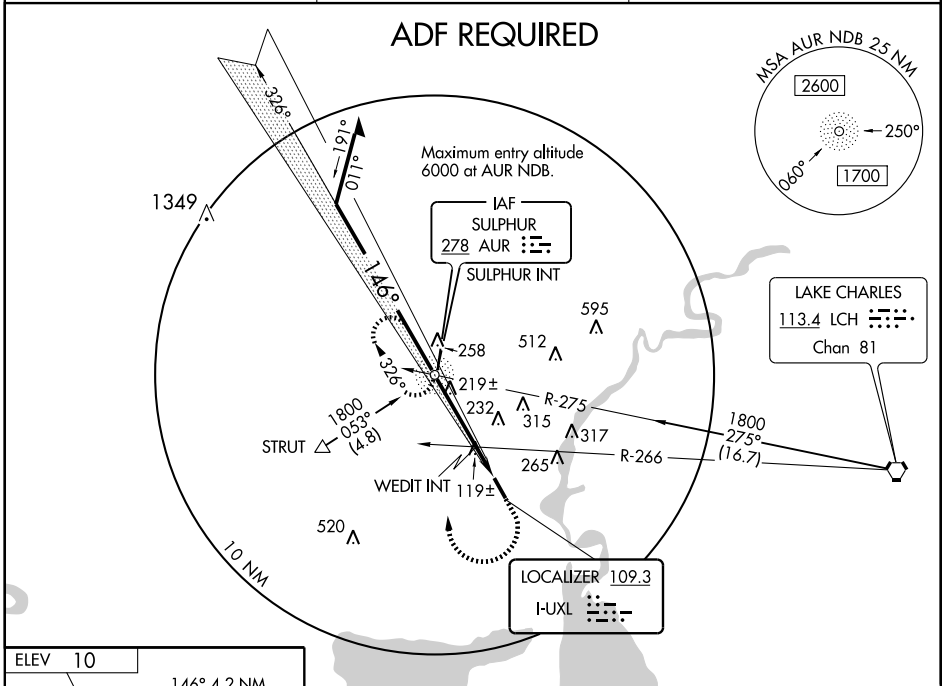

SC-4, 19 NOV 2009 to 17 DEC 2009

SC-4, 19 NOV 2009 to 17 DEC 2009

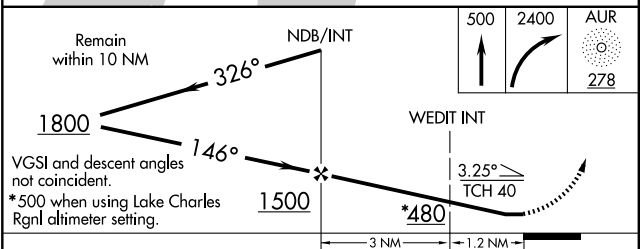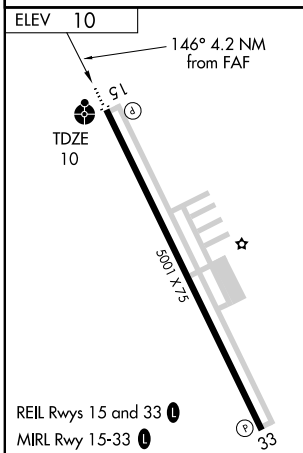

CATEGORY	A		B		C		D		
	S-15	480-3/4	470 (500-3/4)	480-1 1/4	470 (500-1 1/4)	480-1 1/2	470 (500-1 1/2)		
CIRCLING	480-1	470 (500-1)	520-1	510 (600-1)	520-1 1/2	510 (600-1 1/2)	640-2	630 (700-2)	
WEDIT FIX MINIMUMS									
S-15	380-3/4		370 (400-3/4)				380-1 1/4		370 (400-1 1/4)
CIRCLING	420-1	410 (500-1)	520-1	510 (600-1)	520-1 1/2	510 (600-1 1/2)	640-2	630 (700-2)	

FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24